


ALD-15

12th Gen Intel® Alder Lake Processor with H610 chipset based Mini ITX Motherboard

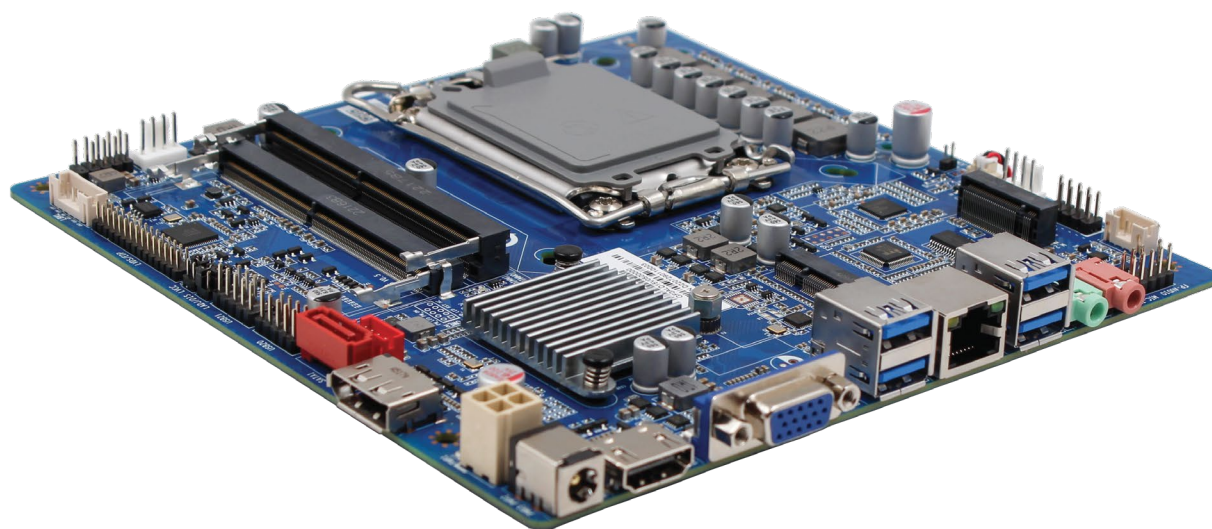

Features

- CPU: 12th Gen Intel Core™, Celeron® and Pentium® Processor+H610
- Memory: Dual Channel SO-DIMM DDR4 up to 64GB
- Display: Integrated Graphics via DP, HDMI, LVDS/eDP, VGA
- Ethernet: 10/100/1000 Mbps
- Storage: SATA3.0, M.2 for SATA/NVMe SSD (PCIe4X Signal)
- Expansion: M.2 for WiFi, support PCIe/CNVi/USB2.0
- Power: 19V DC input



IoT Solutions
Alliance
Industrial Solution
Builders Specialist

Maxtang®

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

The Maxtang mini ITX ALD-15 embedded motherboard is based on an LGA1700 socket; select from the 12th Gen Intel® Core™ i3/i5/i7/i9, Celeron® and Pentium® (Code name: Alder Lake) processors with an H610 chipset. It provides a complete PC platform with powerful performance; supports trio displays via HDMI+VGA+DP or LVDS/eDP in addition to dual-channel SO-DIMM DDR4 memory. Features with 1-Gigabit ethernet controllers, M.2_E for WiFi, M.2_N and SATA3.0 for storage, and plenty of USB ports for other usages.

The ALD-15 is an ideal solution for various applications. It retains the robust design like all other Maxtang products with cost advantages. Our goal is to provide the customer great user experience with a reliable product for more flexibility and productivity.



H/W Monitor



Watchdog




GPIO



Brightness

I/O Interfaces

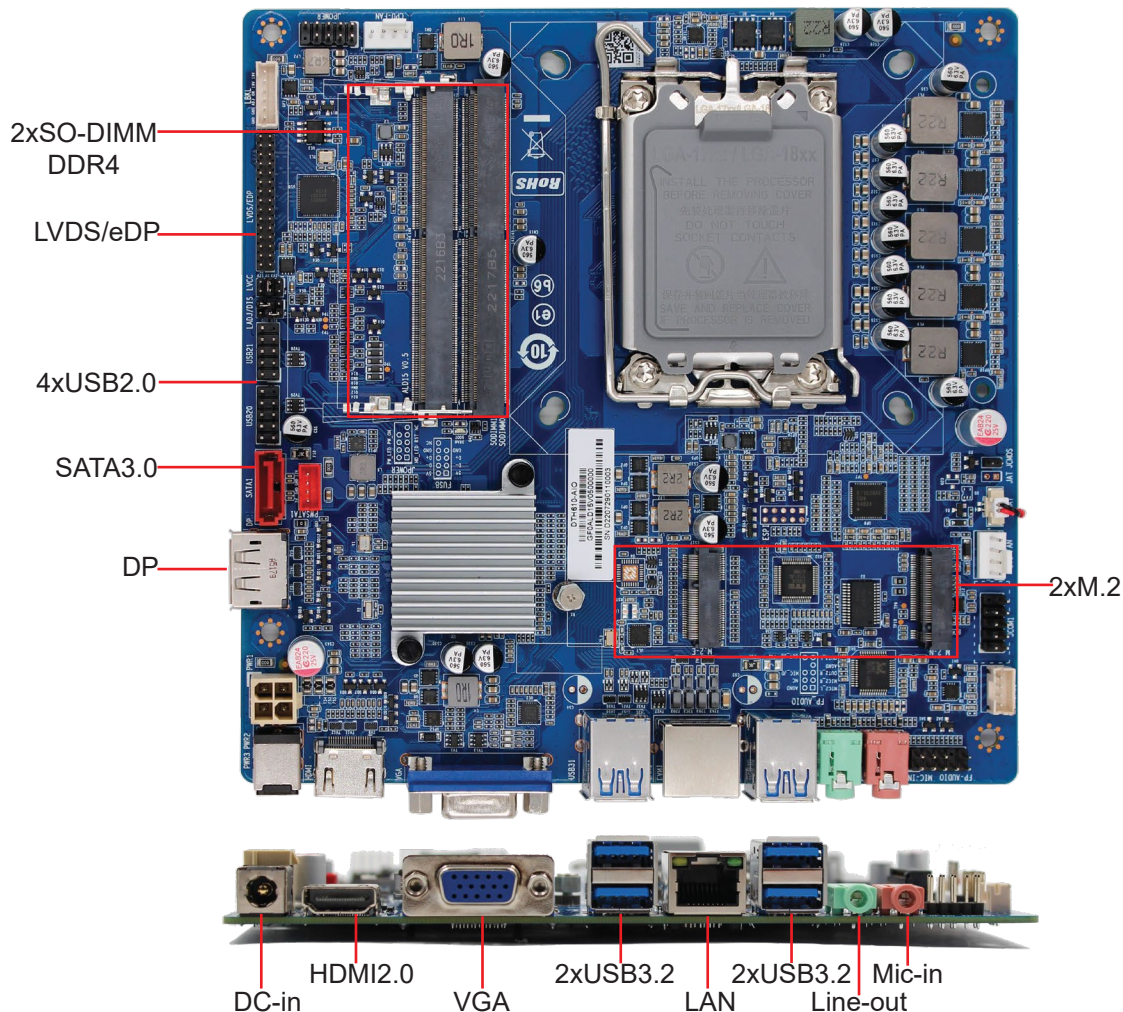


Technical Specifications

Processor	CPU	12th Gen Intel® Core™ i3/i5/i7/i9, Celeron® and Pentium® Processor ≤65W
	Socket	LGA1700
	Chipset	H610
	BIOS	AMI UEFI BIOS
Memory	Type	Dual Channel SO-DIMM DDR4
	Max.Capacity	64 GB
Display	GPU	Intel® Integrated graphics
	Display via	1 x HDMI+1xVGA+1xDP+1xLVDs/eDP, Maximum Trio Display
Ethernet	Speed	10/100/1000 Mbps
	Controller	RTL8111H
	Interface	1xRJ45
Audio	Audio codec	Realtek HD
	Interface	Line-out, Mic-in, supports audio header and power amplifier header
Hardware		CPU temperature, System temperature, On-board voltage, Watchdog
Storage	M.2	1x M.2_N 2280 for SATA/NVMe SSD (PCIe3.0 4X signal)
	SATA3.0	1
Expansion	M.2	1x M.2_E 2230 for WiFi, support PCIe/CNVi/USB2.0
I/O Interface	JCOM	1
	LAN	1
	USB3.2	4
	USB2.0	4
	Audio	1x line-out + 1x mic-in
Dimension	Size	170mm x 170mm
	Board Type	Mini ITX
Power	Standard Port	19V DC-in
Temperature	Operating Temp.	-20°C to 60°C
	Storage Temp.	-40°C to 80°C
Operating System		Windows 10/11 64bit, Linux 64bit

* All specifications and photos are subject to change without notice.

Connector Diagram

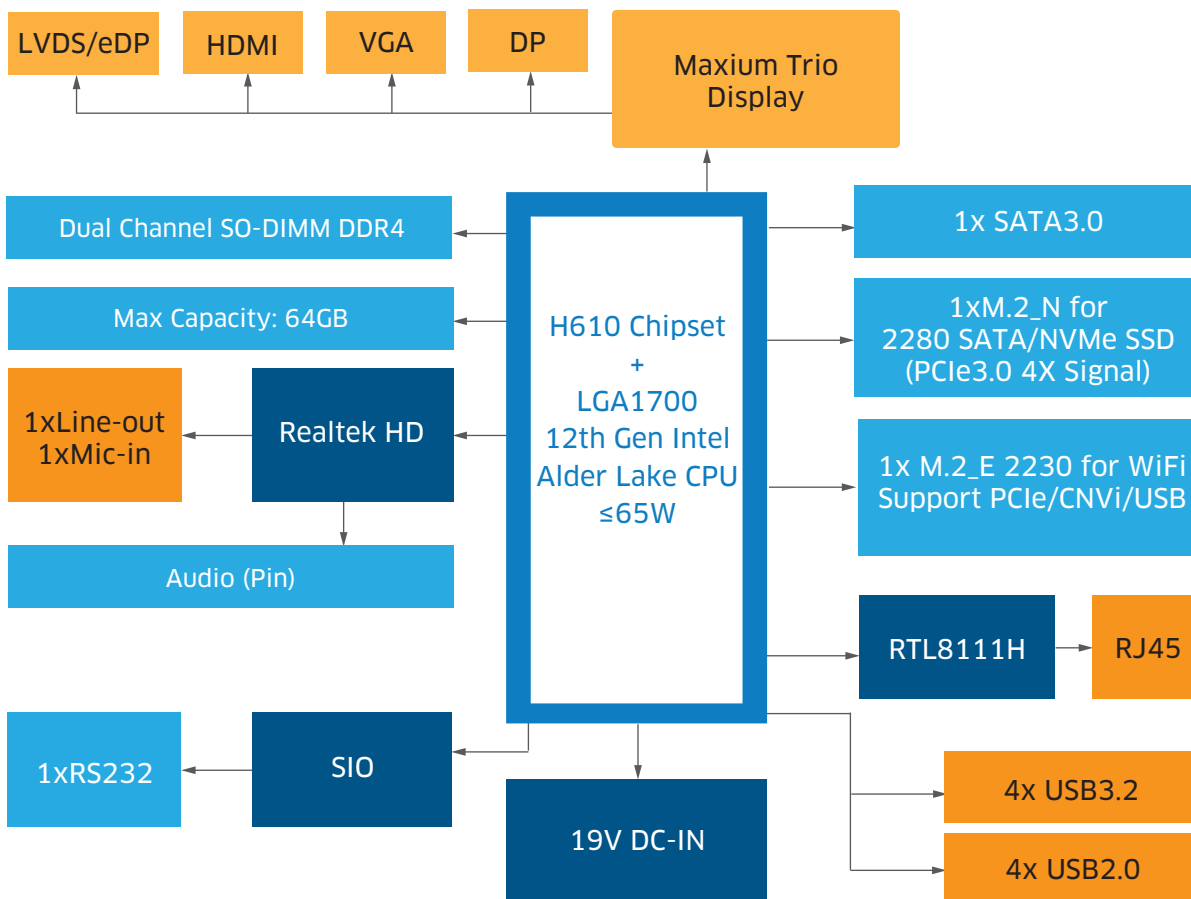

Copyright © 2022 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.