


ALN-10

Intel® Alder Lake-N Series Processor based Mini ITX Motherboard

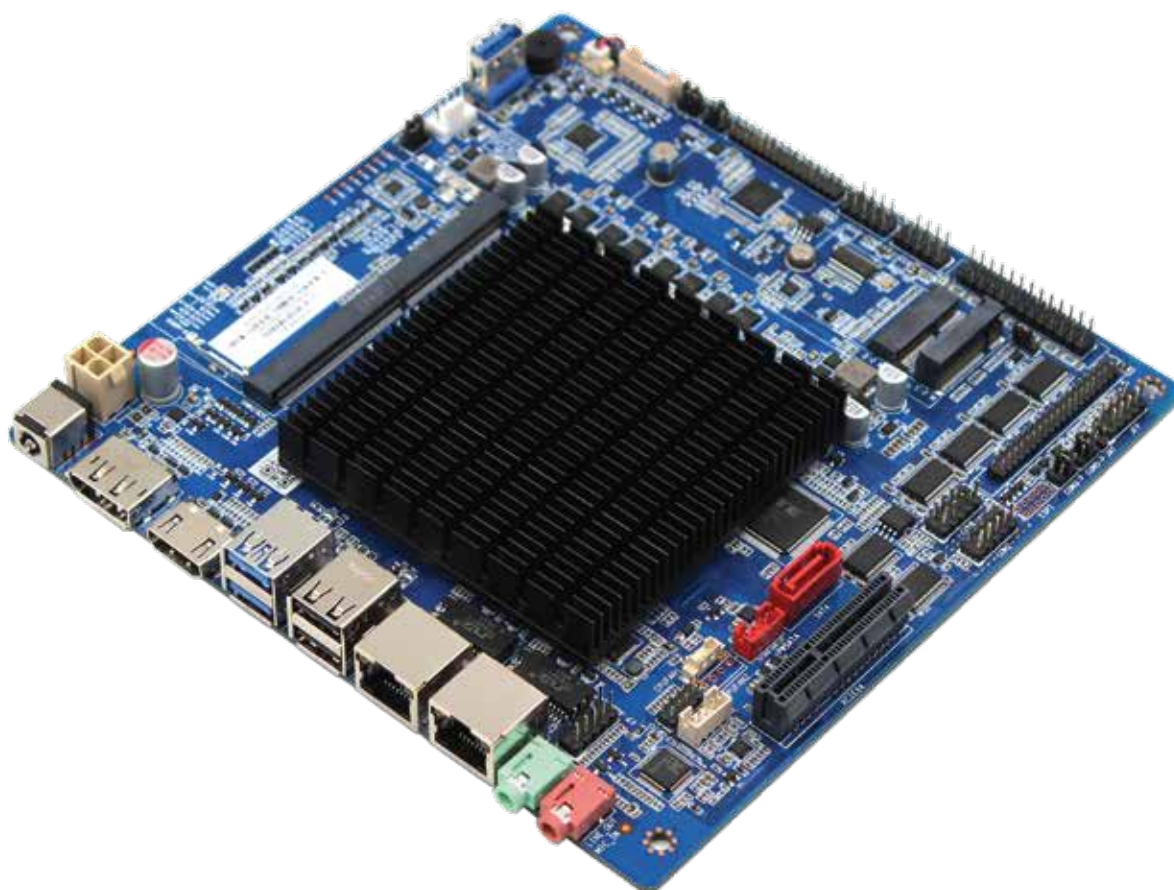

Features

- CPU: Intel® Alder Lake-N Series processor
- Memory: Single channel SO-DIMM DDR4 up to 32GB
- GPU: Integrated Intel® UHD Graphics
- Ethernet Controller: Dual RJ45 Intel i226 2.5GbE
- Storage: 1xM.2 for SATA SSD/4G, 1xSATA
- Expansion: M.2 for WiFi, PCIe 4X(2X Signal)
- Power: 19V/12V DC-in



IoT Solutions
Alliance
Industrial Solution
Builders Specialist

Maxtang[®]

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

The Maxtang ALN-10 is based on the 12th Gen Intel Alder Lake-N series processor ideal for various industrial applications. The board supports up to 8 cores and 8 threads, faster graphics performance with low power consumption. Its small form factor design is great for IoT deployments that require powerful performance, high-speed connectivity, and enhanced graphics density. It Supports 1xSO-DIMM DDR4 up to 32GB, features HDMI2.0+DP+LVDS/EDP for multitasking, a rich I/O interfaces includes 6xCOM, 2xUSB3.2+6xUSB2.0+1xUSB Dongle, 2xLAN, 1xSATA, 2xM.2 connector, PCIe4X(Pcie 2X Signal), GPIO and optional TPM2.0 for added security.

The ALN-10 drives more value for IoT use cases with differentiated capabilities and offers an immersive experience through the Intel UHD graphics for multiple 4K independent displays. The motherboard is great for energy saving, suitable for surveillance, digital signage, electronic gaming machine, and thin client.



H/W Monitor



Watchdog




GPIO



Brightness


I/O Interfaces

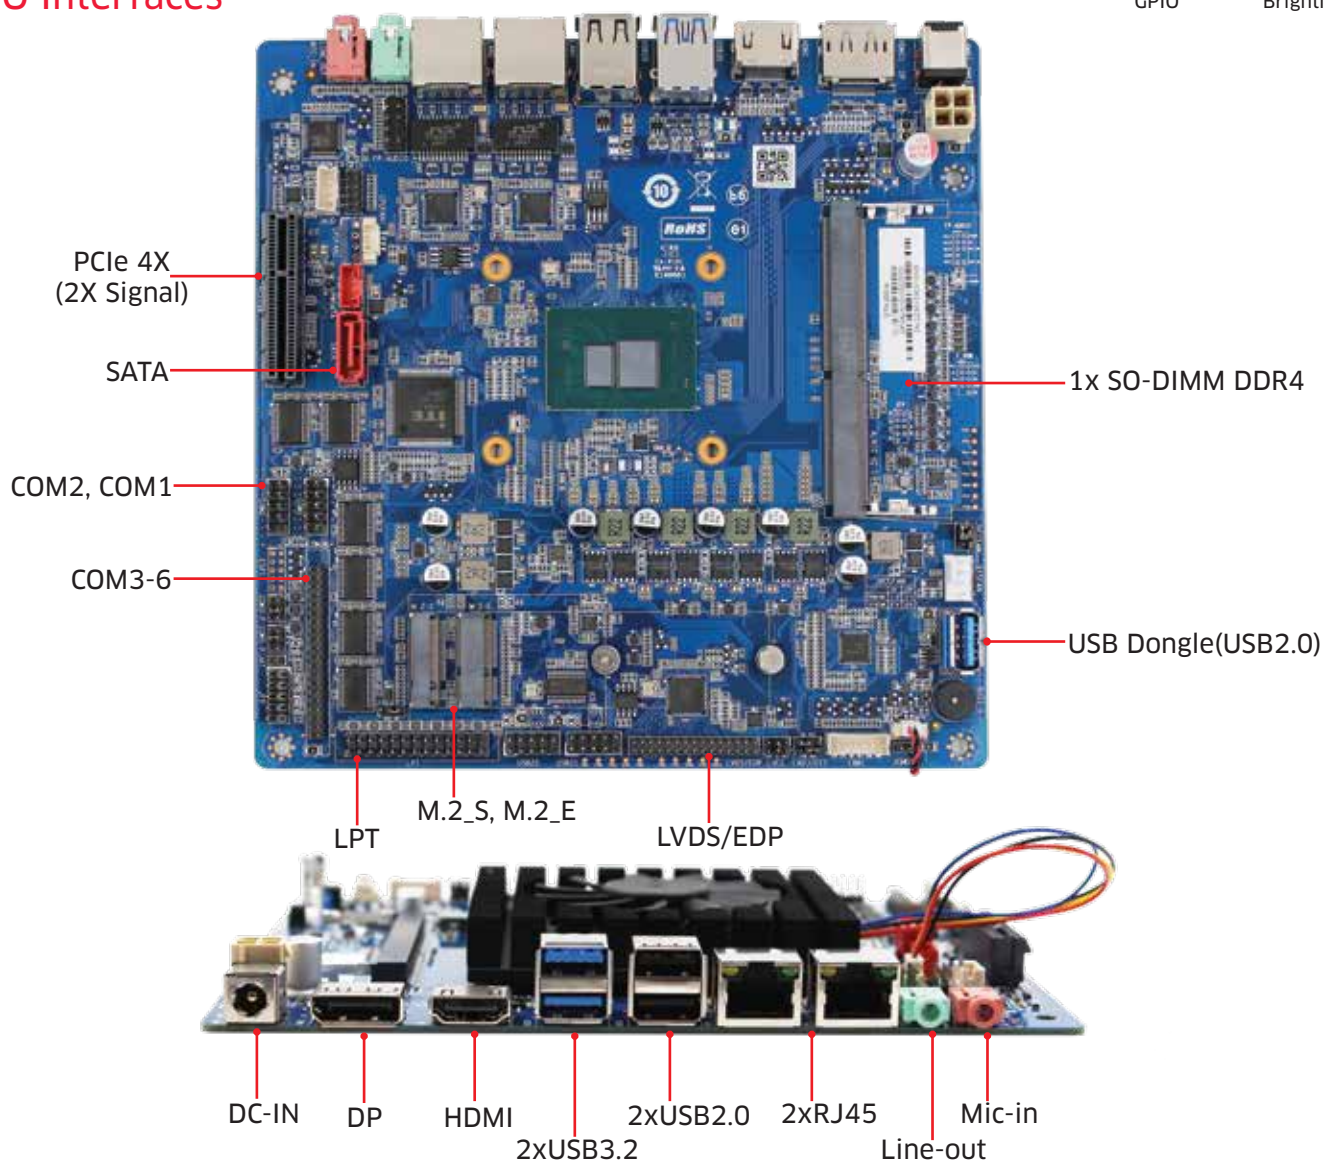

Technical Specifications

Processor	Alder Lake N Series	i3-N305	N300	N200	N100	N97	N50	
	Total Cores/Threads	8C/8T	8C/8T	4C/4T	4C/4T	4C	2C	
	Max Turbo Frequency	3.80GHz	3.80GHz	3.70GHz	3.40GHz	3.60GHz	3.40GHz	
	Cache	6MB	6MB	6MB	6MB	6MB	6MB	
	TDP	15W	7W	6W	6W	12W	6W	
	Cooling Method	Active	Passive	Passive	Passive	Active	Passive	
	BIOS	AMI UEFI BIOS						
	Memory	Type	Single Channel SO-DIMM DDR4					
Max.Capacity		32GB						
Display	GPU	Integrated Intel UHD Graphics						
	Interface	1x HDMI2.0+1x DP+1x LVDS/eDP						
Ethernet	Controller	2x Intel i226 Data Rate Per Port: 2.5GbE						
	Interface	2xRJ45						
	Wake on LAN	Yes						
Audio	Audio Codec	Realtek HD						
	Interface	1xLine-out, 1xMic-in, supports audio header and amplifier header						
Hardware	CPU system temperature, onboard voltage, watchdog, and auto power on							
Storage	M.2	1xM.2 for SATA SSD/4G						
	SATA	1						
Expansion	M.2	1x M.2 for WiFi, support Intel® Integrated Connectivity (CNVi)						
	PCIe4X	1(PCIe 2X Signal)						
	SIM	Optional						
I/O Interface	LAN	2						
	COM	6xCOM: 6*RS232(default) or 5*RS232+1*RS485(COM2)						
	USB3.2	2*rear ports						
	USB2.0	2*rear ports+4*headers						
	USB Dongle	1(USB2.0)						
	GPIO	8						
	Audio	1xLine-out, 1xMic-in						
	TPM2.0	Onboard, optional						
	Dimension	Size	170mm×170mm					
		Board Type	Mini-ITX					
Power	Standard Port	12/19V DC-in						
	Peripheral Input	For Fan and SATA						
	Operating Temp.	-20°C ~60°C						
	Storage Temp.	-40°C ~80°C						
Operating System	Win10/11 64 bit, Linux 64 bit							

Functional Block Diagram

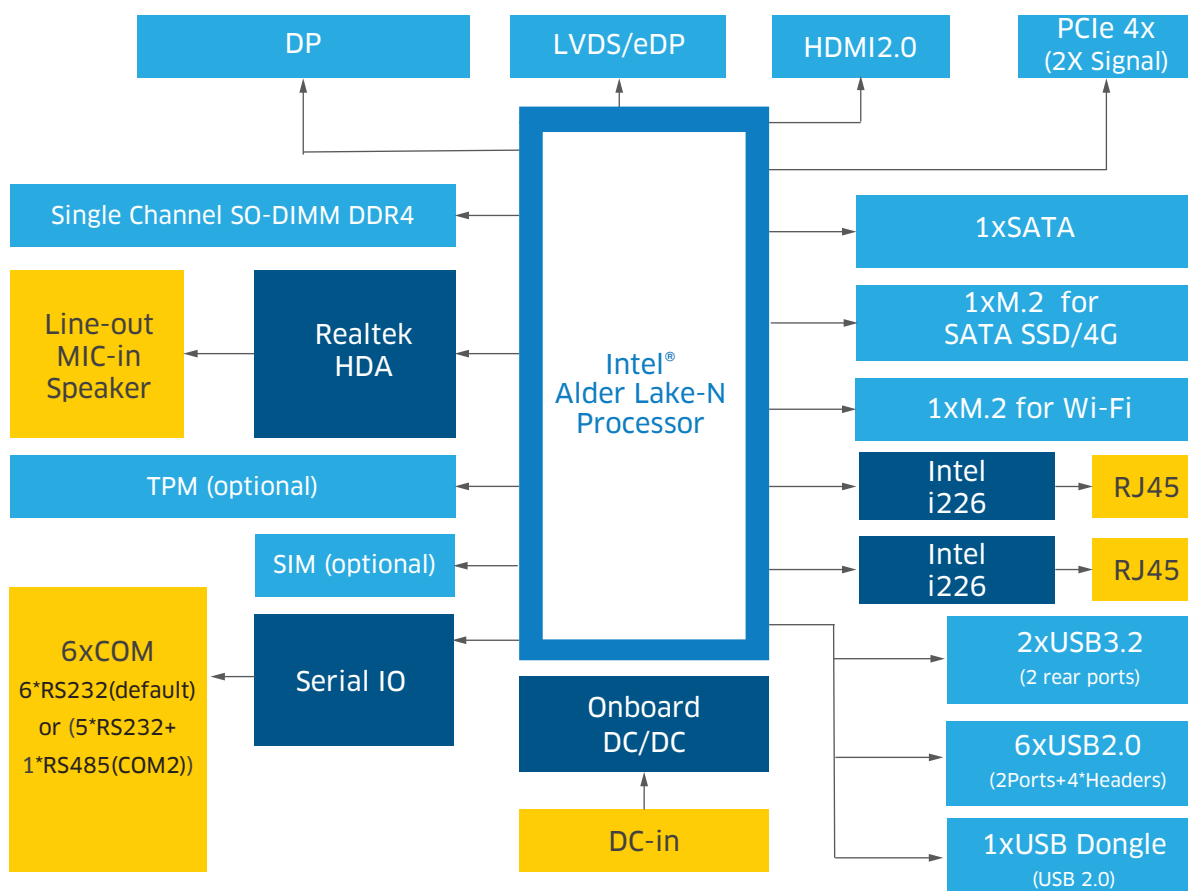

Order Information

Model Name	Description
DTN305-A	DT MINI-ITX Intel Core i3-N305 ALN10 2LAN 6*RS232 HDMI+DP+LVDS NO SIM
DTN300-A	DT MINI-ITX Intel Core i3-N300 ALN10 2LAN 6*RS232 HDMI+DP+LVDS NO SIM
DTN200-A	DT MINI-ITX Intel N200 ALN10 2LAN 6*RS232 HDMI+DP+LVDS NO SIM
DTN100-A	DT MINI-ITX Intel N100 ALN10 2LAN 6*RS232 HDMI+DP+LVDS NO SIM
DTN97-A	DT MINI-ITX Intel N95 ALN10 2LAN 6*RS232 HDMI+DP+LVDS NO SIM
DTN50-A	DT MINI-ITX Intel N50 ALN10 2LAN 6*RS232 HDMI+DP+LVDS NO SIM

*For customized options, please consult regional sales. And please confirm the model name and description before purchasing. *The model name and description might vary due to inventory changes.