

MTN-FP650 V2.0

Empowers Your Performance with AMD Ryzen™ 5000H Series Mobile Processors and Radeon™ Graphics



Features

- CPU: AMD Ryzen™ 5000H Mobile Processors
- Memory: Dual Channel DDR4 for Memory up to 64GB
- Display: AMD Radeon™ Graphics, Displays via 2x HDMI2.0 plus DisplayPort1.4(USB-C)
- I/O Ports: 2xUSB3.2, 2xUSB2.0, 1xLAN, USB-C Gen2, Line-out, Mic-in,
- Expansion: M.2 for WiFi and Bluetooth
- Storage: SATA3.0, M.2 for NVMe/SATA SSD
- Power: 19V DC-in



Introduction

The Maxtang MTN-FP650 is an ultra-compact mini-PC that uses the AMD Ryzen™ 5000H series mobile processor to deliver excellent performance while saving space. With dual-channel SO-DIMM DDR4 support of up to 64GB and dual display through Radeon™ Graphics via 2xHDMI2.0, this mini-PC provides an immersive visual experience. It also features a 10/100/1000 Mbps ethernet controller, SATA3.0, M.2 for storage, and an additional M.2 for Wi-Fi & Bluetooth.

The MTN-FP650 is low on power consumption, making it reliable and stable for multitasking, creating, playing, working, educating, and entertaining. Its rich I/O interface includes 2x USB3.2, 2xUSB2.0, 1xLAN, 1x USB-C, Mic-in, and Line-out with standard 19V DC-in, catering to most market requirements. This mini-PC is perfect for a wide range of applications such as office, retail, digital signage, and hospital use. Its diminutive size ensures it takes up minimal space on a desk and makes it an excellent solution where traditional PCs won't fit.





H/W Monitor



Watchdog

I/O Interfaces

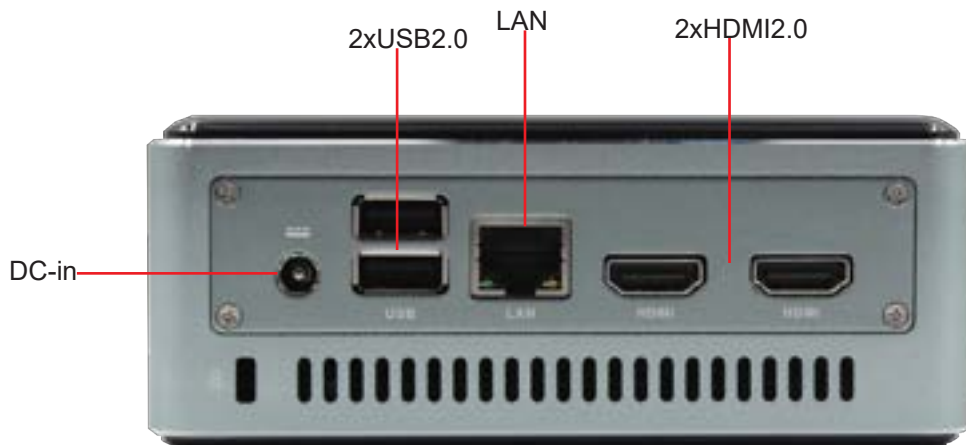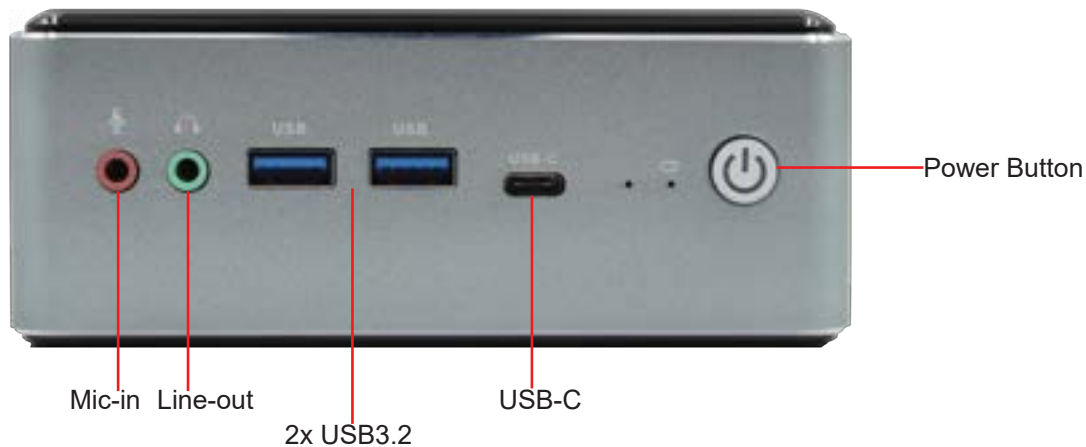

Wi-Fi




Bluetooth

Technical Specifications

Processor	CPU:AMD "Zen 3"	Ryzen™ 7 5800H	Ryzen™ 5 5600H
	# of CPU Cores	8	6
	# of Threads	16	12
	Max. Boost Clock	4.4GHz	4.2GHz
	Base Clock	3.2GHz	3.3GHz
	Total L2 Cache	4MB	3MB
	Total L3 Cache	16MB	16MB
	BIOS	AMI UEFI BIOS	
Display	GPU	AMD Radeon™ Graphics	
	Interface	2xHDMI2.0 plus DisplayPort 1.4 through USB-C	
Memory	Type	Dual Channel SO-DIMM DDR4	
	Max Capacity	64GB	
Ethernet	Speed	10/100/1000 Mbps	
	Controller	RTL8111H	
	Interface	1x RJ-45	
Audio	Audio Codec	Realtek HD	
	Interface	1xLine-out, 1xMic-in	
Hardware	CPU temperature, System temperature, Onboard voltage, Watchdog		
Storage	M.2	1xM.2 for NVMe/SATA SSD	
	SATA3.0	1	
Expansion	M.2	1xM.2 for WiFi and Bluetooth	
Other I/O	USB2.0	2	
	USB3.2	2	
	USB-C	1x USB-C: Support USB3.2 Gen 2/Display Port1.4	
Dimension	Size	128 mm x 130 mm x 52mm (L x W x H)	
Power	Standard Port	19V DC-in	
Temperature	Operating Temp.	0°C to 50°C	
	Storage Temp.	-20°C to 70°C	
Cooling	Active		
Operating System	Support Windows 10/11 64bit, Linux 64bit		

*All specifications and photos are subject to change without notice.

Dimension

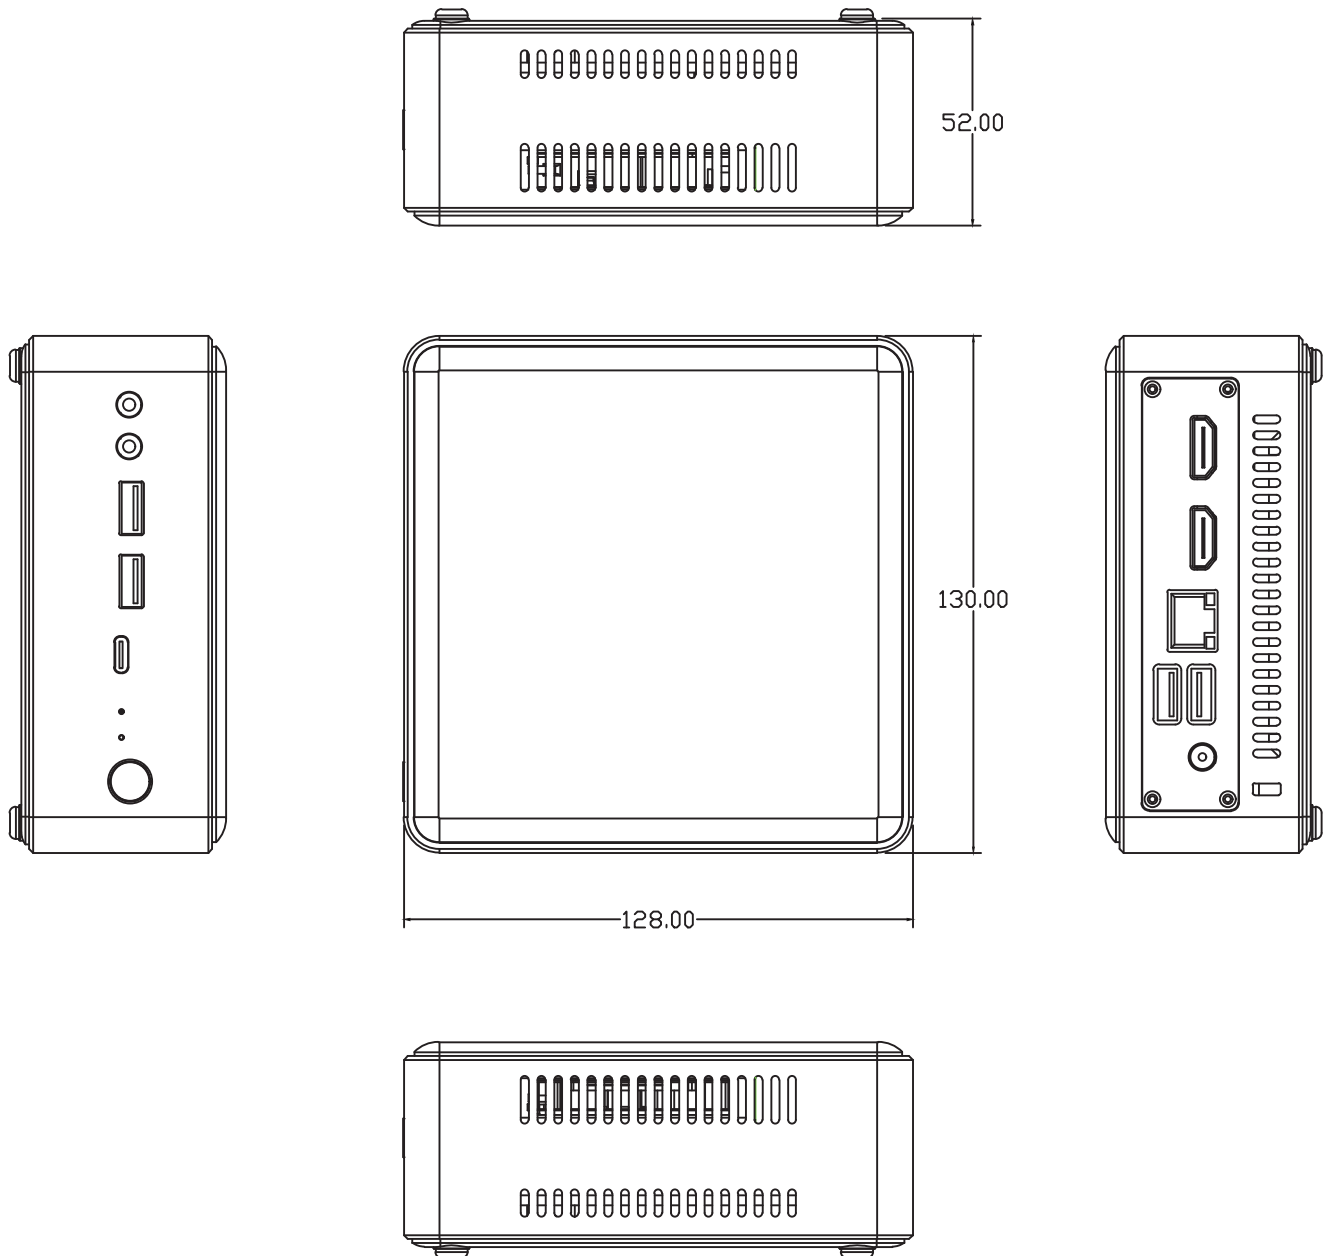

Copyright ©2023 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.