

IXWL-35

Intel® Whiskey Lake U/Comet Lake U based Embedded Industrial PC



Features

- CPU: Intel® Whiskey Lake U/Comet Lake U processor
- Memory: Dual Channel SO-DIMM DDR4 up to 64 GB
- Display: Intel® UHD Graphics via HDMI, DP, VGA optional
- Ethernet: 10/100/1000Mbps
- Storage: SATA3.0, 1x M.2 for 2242 SSD/4G
- Expansion: M.2 for WiFi
- Power: 12V/19V DC input, Phoenix input optional



IoT Solutions
Alliance

Industrial Solution
Builders Specialist

Introduction

The IXWL-35 is a compact, fanless embedded industrial PC powered by the Intel Whiskey Lake U/Comet Lake U processor. It supports dual-channel SO-DIMM DDR4 up to 64GB, a TDP rate of 15W, great for energy saving. A rich I/O interface includes HDMI, DP, two RJ45 gigabit network controllers, six serial ports(or 5 COM+1 VGA), and eight USB ports that cater to most market needs.

The system is an ideal solution for various industrial applications, features diverse I/O ports for easy integration, and ruggedized design for harsh environments. The fanless nature protects it from dust, particles, chemical or moisture ingress. It provides a great user experience based on its stability and reliability.



H/W Monitor



Watchdog






GPIO



Brightness


I/O Interfaces

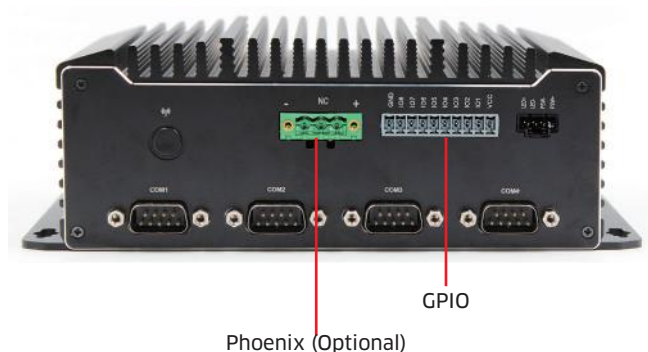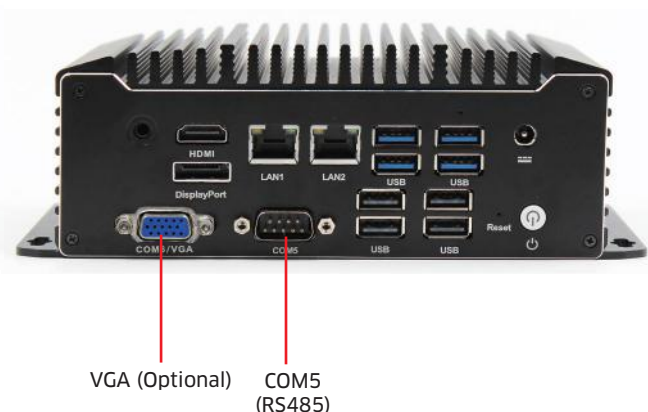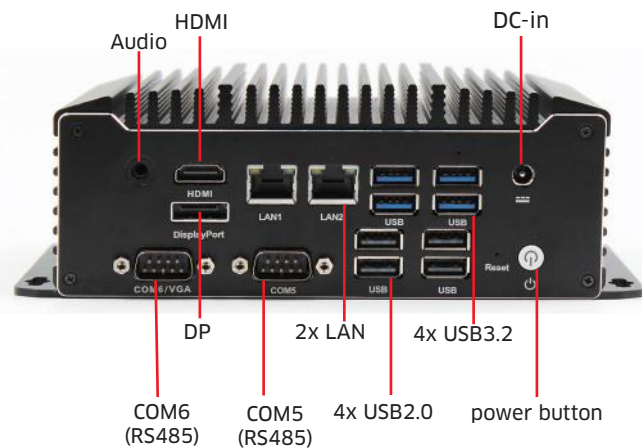

Technical Specifications

Processor	Comet Lake U	i3-10110U	i5-10210U	
	Base Frequency	2.1GHz	1.6 GHz	
	Max Turbo Frequency	4.1GHz	4.2 GHz	
	Cache	4MB	6MB	
	Whiskey Lake U	Pentium 5405U	Celeron 4205U	i3-8145U
	Base Frequency	2.3 GHz	1.8 GHz	2.1 GHz
	Max Turbo Frequency	/	/	3.9 GHz
	Cache	2MB	2MB	4MB
	TDP	15W		
	BIOS	AMI UEFI BIOS		
Memory	Type	Dual Channel SO-DIMM DDR4		
	Max capacity	64GB		
Display	GPU	Integrated Intel® UHD Graphics based on CPU		
	Display via	HDMI+DP+VGA optional		
Ethernet	Speed	10/100/1000Mbps		
	Controller	1x Intel® i210 + 1x Intel® i219		
	Interface	2x RJ45		
Audio	Wake on LAN	Yes		
	Audio codec	Realtek HD		
Hardware	Interface	1xCTIA 2-in-1 Audio Jack		
		System temperature, Onboard voltage, Watchdog, Auto power on		
Storage	M.2	1x M.2 for 2242 SSD/4G		
	SATA	1x SATA3.0		
Expansion	M.2	1x M.2 for Wi-Fi		
Other I/O	COM	Default: 2xRS485 +4xRS232		
		Optional: 1xRS485+VGA +4xRS232		
	USB2.0	4		
	USB3.2	4		
Dimension	Size	165mm x 125mm x 65mm		
Power	Standard input	12V/19V DC-IN		
	Phoenix input	16-30V Phoenix input optional		
	Peripheral Input	For Fan and SATA		
	LED Indicator	Power indicator		
Temperature	Operating Temp.	-20°C to 60°C		
	Storage Temp.	-40°C to 80°C		
Cooling		Passive		
Operating System		Win7/8/10 32/64bit, Linux 32/64 bit		

Dimensions

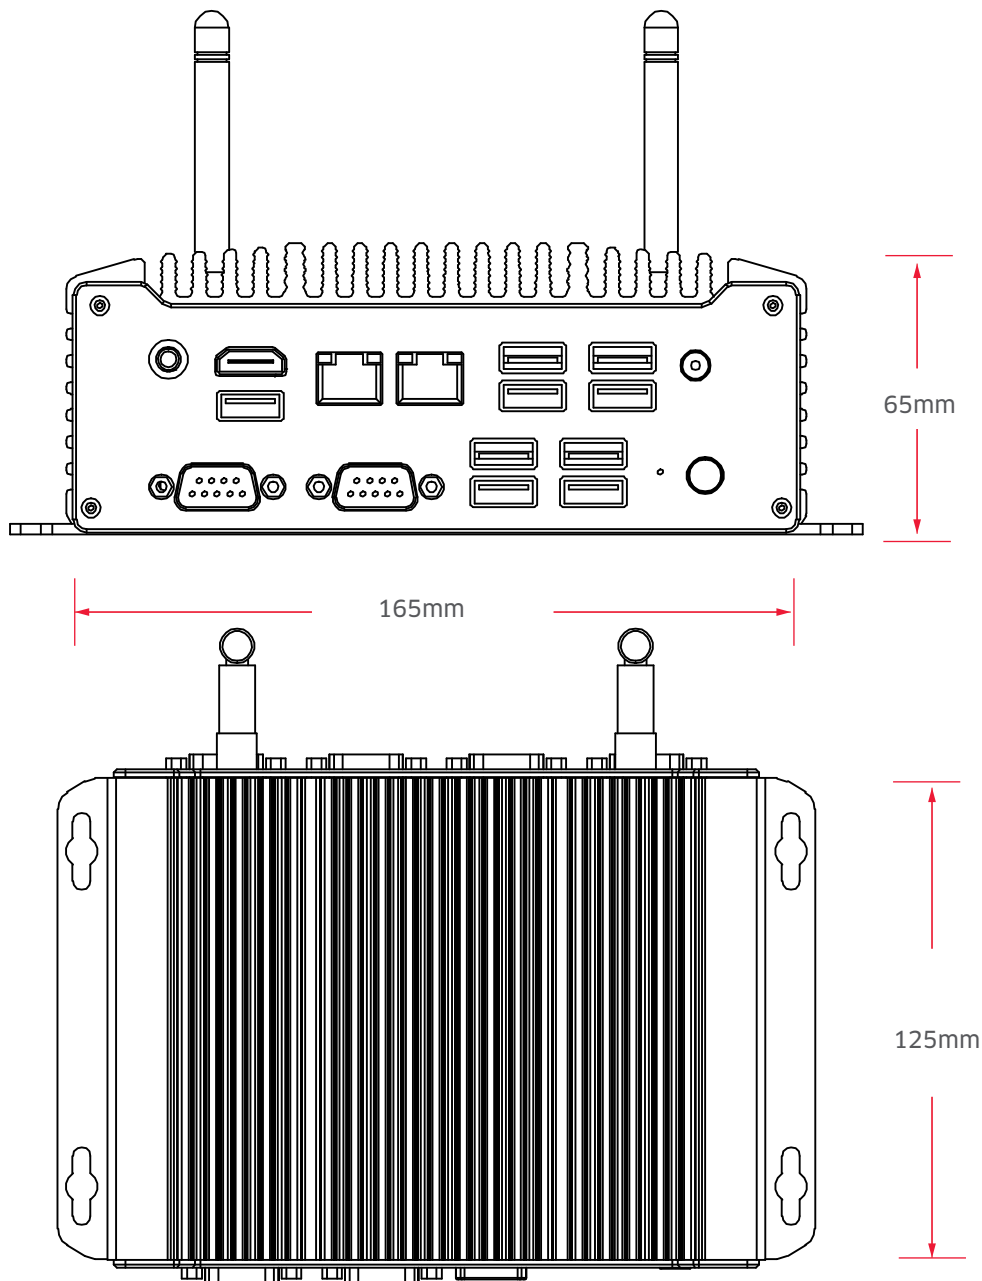

Copyright ©2018 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.