


EHL-35V1.0

Intel® Elkhart Lake Processor
based 3.5" Single Board Computer

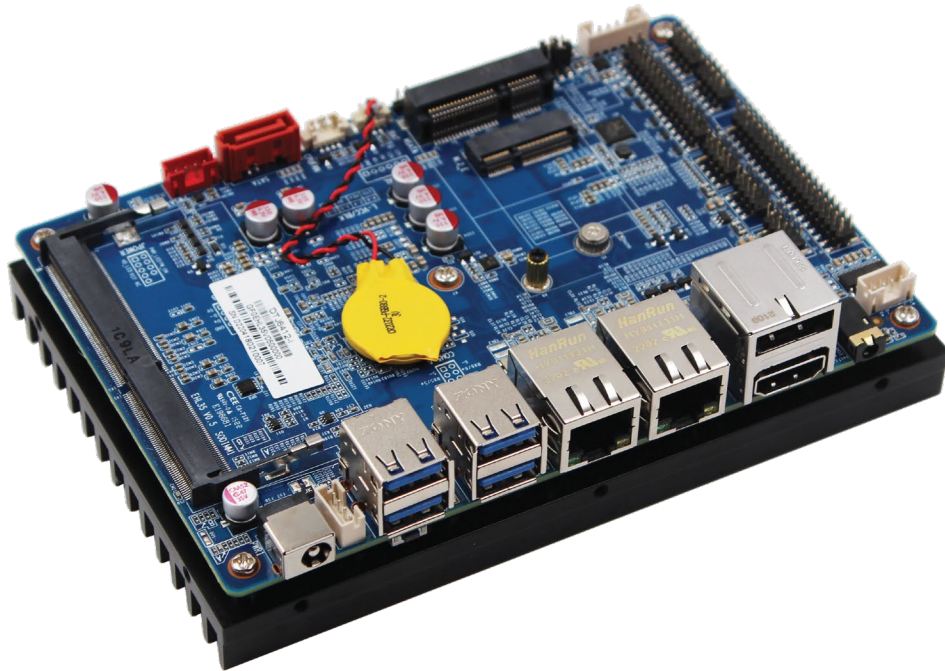

Features

- CPU: Intel® Celeron® Processor J6412
- Memory: Single Channel SO-DIMM DDR4 up to 32GB
- Display: Integrated Graphics display via HDMI®, DP, eDP/LVDS
- Ethernet: 10/100/1000 Mbps
- Storage: SATA3.0, mSATA
- Expansion: M.2 Key E for 2230 WiFi and Bluetooth Module
- Power: 12V DC input



Introduction

The Maxtang EHL-35V1.0 is a 3.5" disk-size single-board based on the Intel® Celeron® J6412 processor, 4Cores 4Threads, 1.5M Cache, and up to 2.60GHz for burst frequency. It supports 1xSO-DIMM DDR4 max to 32 GB, and displays via Intel® UHD Graphics through HDMI®, DP, and eDP. Features two 10/100/1000 Mbps Ethernet controllers, M.2 for Wi-Fi, SATA, and mSATA for storage. A rich input/output interface includes 6xCOM, 8xUSB, GPIO, and CTIA audio jack with standard 12V DC-in, which caters to most market requirements.

The board provides powerful performance with low power consumption, ideal for various industrial applications. It retains a robust design at a new cost-effective price point and is great for energy saving. The sustainable features with a long-lasting life cycle bring increased productivity with stable, reliable real-time production.



H/W Monitor



Watchdog




GPIO



Brightness




I/O Interfaces

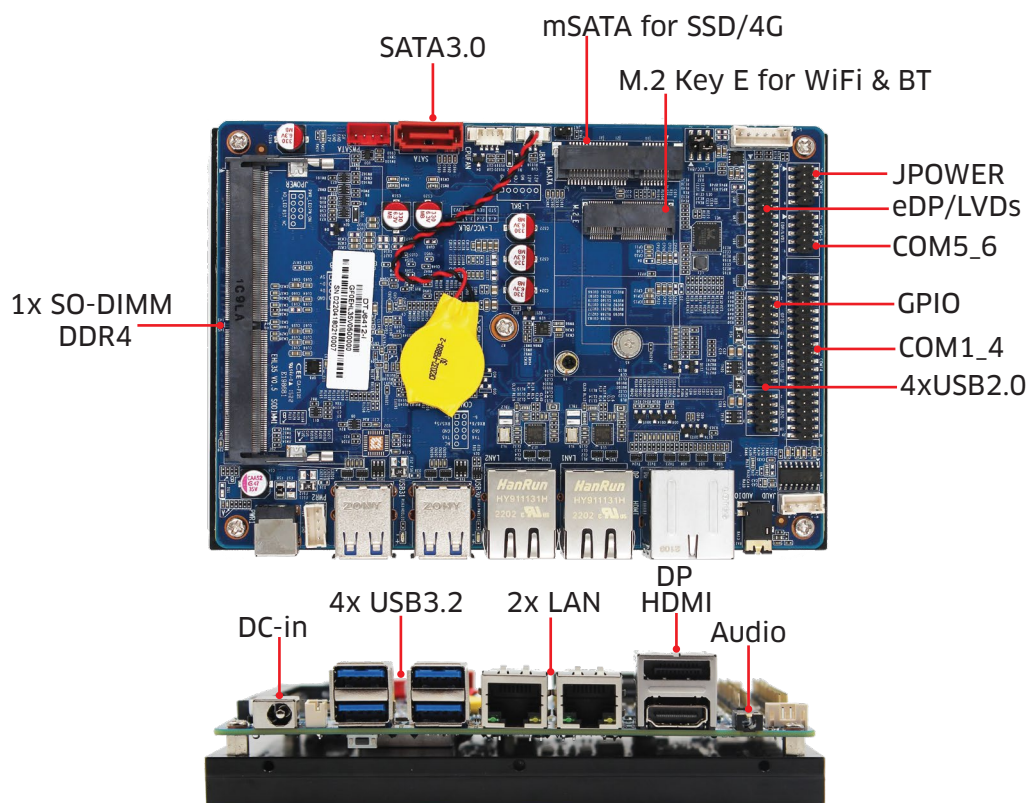

Technical Specifications

Processor	CPU	Celeron J6412
	Total Cores/Threads	4T/4C
	Base Frequency	2.0GHz
	Burst Frequency	2.6GHz
	L2 Cache/L3 Cache	1.5MB/4MB
	TDP	10W
	BIOS	AMI UEFI BIOS
Memory	Type	Single Channel SO-DIMM DDR4
	Max. Capacity	32GB
Display	GPU	Integrated Intel® UHD Graphics for 10th Gen Intel® Processors
	Display via	1 x HDMI® + 1 x DP + 1 x eDP/LVDs
Ethernet	Controller	2 x RTL8111H
	Speed	10/100/1000/2500 Mbps
	Interface	2 x RJ45
	Wake on LAN	Yes
Audio	Audio Codec	Realtek HD ALC897
	Interface	1 x CTIA Audio Jack, Line-out + Mic-in in one, supports power amplifier
Hardware	CPU system temperature, on-board DC-in voltage, watchdog, auto power on	
Storage	mSATA	1 x mSATA for SSD/4G Module
	SATA3.0	1 x SATA3.0
Expansion	M.2	1 x M.2 Key_E for 2230 Wi-Fi and Bluetooth
	SIM	SIM optional
I/O Interface	COM	6 x COM: 4*RS232+2*RS485(COM5_6) by default, or 6*RS232 Optional
	USB3.2	4 x USB3.2(ports)
	USB2.0	4 x USB2.0(headers)
	GPIO	8-bit
Dimension	Size	146 mm x 102mm
	Form Factor	3.5" SBC
Power	Standard Port	12V DC-in
	Peripheral Input	For Fan and SATA
	LED Indicator	Power Indicator
Temperature	Operating Temp.	-20°C to 60°C
	Storage Temp.	-40°C to 80°C
Operating System	Win10/11 64bit, Linux 64bit	

Functional Block Diagram

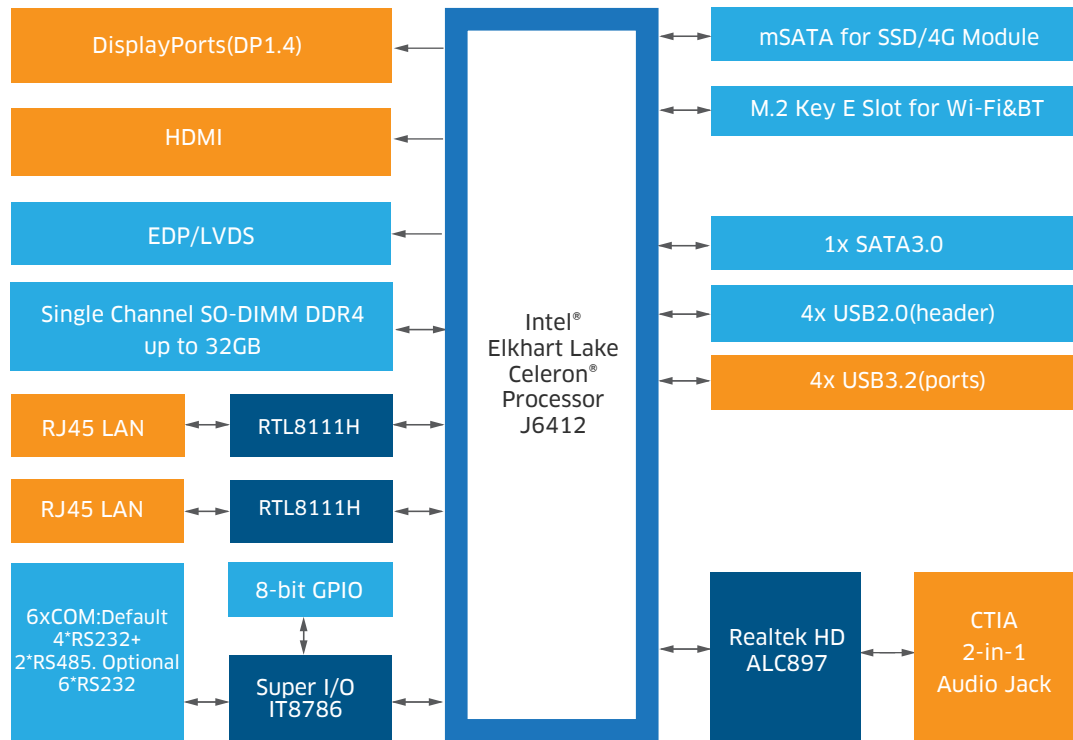

Copyright © 2025 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Order Information

Model Name	Description
DTJ6412-I	DT Intel Celeron J6412 EHL35V1 1DDR4 2LAN 4*RS232 2*RS485 DP+HDMI+LVDS

***For customized options, please contact regional sales. Model names and descriptions are subject to change; please confirm before purchase.