

MTN-ALN50

Intel® Alder Lake N series Processor based Ultra Compact Mini PC with 2HDMI2.0 plus DP1.4(USB-C)



Features

- CPU: Intel® Alder Lake N series Processor
- Memory: Single Channel SO-DIMM DDR4 up to 16GB
- Display: Integrated Graphics display via 2xHDMI2.0 plus DP1.4(USB-C)
- I/O Ports: 2xLAN, 3xUSB3.2, 1xUSB2.0, USB-C
- Ethernet: 10/100/1000/2500Mbps
- Storage: 1x M.2 2280 SATA, 1xSATA(FPC)
- Power: 12V/19V DC-in



Introduction

Introducing the MTN-ALN50 Ultra Compact Mini PC, powered by the Intel® Alder Lake-N series processor. This mini PC offers a remarkable combination of computing power and cost efficiency. With support for single-channel SO-DIMM DDR4 memory up to 16GB, delivers a smooth performance for multitasking efficiency. The mini pc offers multiple displays feature through 2xHDMI2.0 plus a USB-C port with DisplayPort 1.4 Alt Mode functions. For storage-wise, an M.2 interface and FPC SATA interfaces can ensure ample space for your data.

Designed with a compact small form factor measuring just 129mm x 127mm x 52.5mm encased in a durable aluminum chassis, the MTN-ALN50 is ideal for space-saving installations in addition to VESA supports. It has a rich I/O interface, including 2xRJ45(2.5GbE), 3xUSB3.2, 1xUSB2.0, and 1xCITA for more flexibility. Whether you prefer a desktop-ready configuration for easy installation or a barebone setup for highly customizable deployments, the MTN-ALN50 meets your specific needs. Its versatility makes it an excellent solution for various applications, including kiosks, point of sale (PoS) systems, retail environments, and other IoT applications.



H/W Monitor



Watchdog



I/O Interfaces



Audio

USB-C

2xUSB3.2

Power Button



2xLAN(RJ45)

1xUSB3.2

1xUSB2.0

2xHDMI

DC-IN



Wi-Fi




Bluetooth

Technical Specifications

Processor	CPU	N100	N305	N97
	Total Cores/Threads	4C/4T	8C/8T	4C
	Max Turbo Frequency	3.40GHz	3.80 GHz	3.60 GHz
	Intel® Smart Cache	6MB	6MB	6MB
	Processor base Power	6W	15 W	12 W
Memory	Type	Single Channel SO-DIMM DDR4		
	Max Capacity	16GB		
Display	GPU	Integrated Intel® UHD Graphics		
	Display Interface	2xHDMI2.0 plus DisplayPort 1.4 through USB-C		
Ethernet	Speed	10/100/1000/2500 Mbps		
	Controller	RTL8125		
	Interface	2xRJ-45		
	Wake on LAN	Yes		
Audio	Audio Codec	Realtek HD		
	Interface	1xCTIA 2-in1 Audio Jack, Supports Line-out+Mic-in		
Hardware	CPU temperature, System temperature, Onboard voltage, Watchdog			
Storage	M.2	1xM.2_2280 Slot for SATA		
	SATA	1x FPC SATA interface		
Expansion	M.2	1xM.2 for WiFi, supports PCIe, USB&CNVi		
	EMMC	Optional		
Other I/O	USB2.0	1		
	USB3.2	3		
	USB-C	1xUSB-C Full-functioned		
		Support USB 3.2 Gen 2 upstream/DisplayPort 1.4 Alt Mode		
	Wired Control	Optional		
	TPM	Optional		
Dimension	Size	129mm x 127mm x 52.5mm (L x W x H)		
Power	Standard Port	12V/19V DC-in		
Temperature	Operating Temp.	0°C to 50°C		
	Storage Temp.	-20°C to 70°C		
Cooling		Active		
Operating System		Win10/11 64bit, Linux 64bit		

*All specifications and photos are subject to change without notice.

Dimension

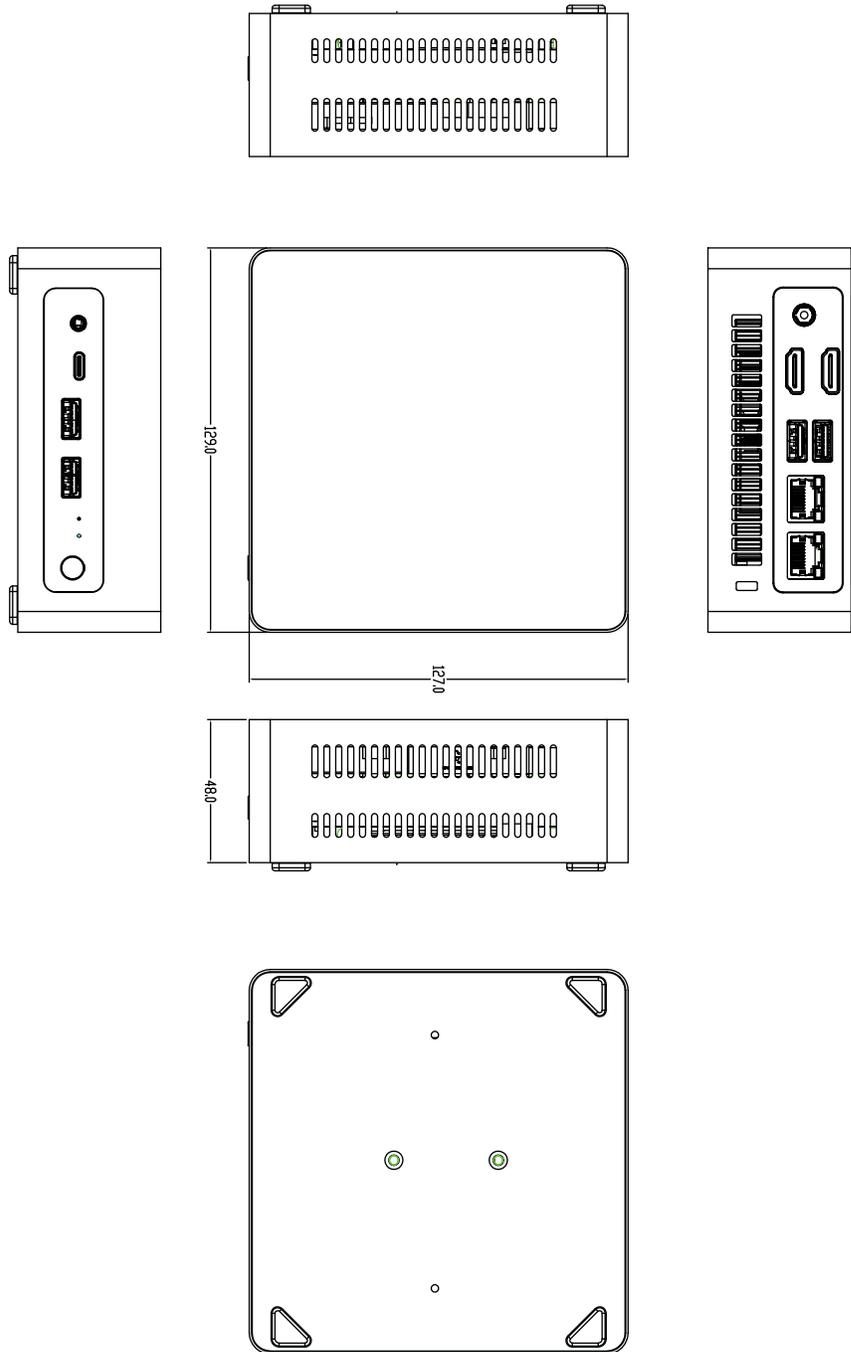

Copyright ©2025 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High Definition Multimedia Interface, HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.