

T0-FP750V2.0


AMD Ryzen™ 6000/7000/8000 FP7r2 Series Processors
with Radeon™ Graphics based Ultra-Compact Mini PC



Features

- CPU: AMD Ryzen™ 6000/7000/8000 FP7r2 Series Processors
- Memory: Dual Channel DDR5 for Memory up to 64GB
- Display: AMD Radeon™ Graphics, Displays via HDMI+DP+USB4
- I/O Ports: 2xUSB-C, 2xUSB3.2, 1xUSB2.0, 1xLAN(2.5GbE), Audio
- Storage: 2xM.2_2280 Slots for NVMe
- Expansion: 1xM.2_2230 Slot for WiFi and Bluetooth
- Power: 19V/20V DC-in

AMD
together we advance_

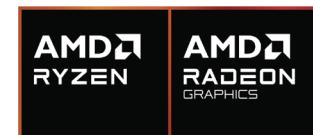


Introduction

The New Maxtang TO-FP750V2.0 is an ultra-compact mini-PC equipped with AMD Ryzen™ 6000/7000/8000 Series processors for excellent performance while great on saving space. It supports dual-channel SO-DIMM DDR5 memory up to 64GB and offers multiple display capabilities through Radeon™ Graphics using HDMI, DP and USB4 interfaces. The Mini PC features a 10/100/1000/2500 Mbps ethernet controller, 2xM.2 NVMe Slots for storage and an additional M.2 for Wi-Fi & Bluetooth. Other I/O interfaces include 2xUSB3.2, 1x USB2.0, 1x LAN(2.5GbE), 2x USB-C and a 2 in 1 CTIA Audio Jack.

It has low power consumption despite its powerful features. The New Maxtang Ultra Compact Mini PC provides an immersive visual experience, increased productivity, stability, and reliability, making it perfect for multitasking, creating, playing, working, educating, and entertaining. It is ideal for a wide range of applications, including gaming entertainment, working studios, office use, education, and home theaters. Its diminutive size takes up minimal desk space and makes it ideal for applications where traditional PCs are unsuitable.


I/O Interfaces

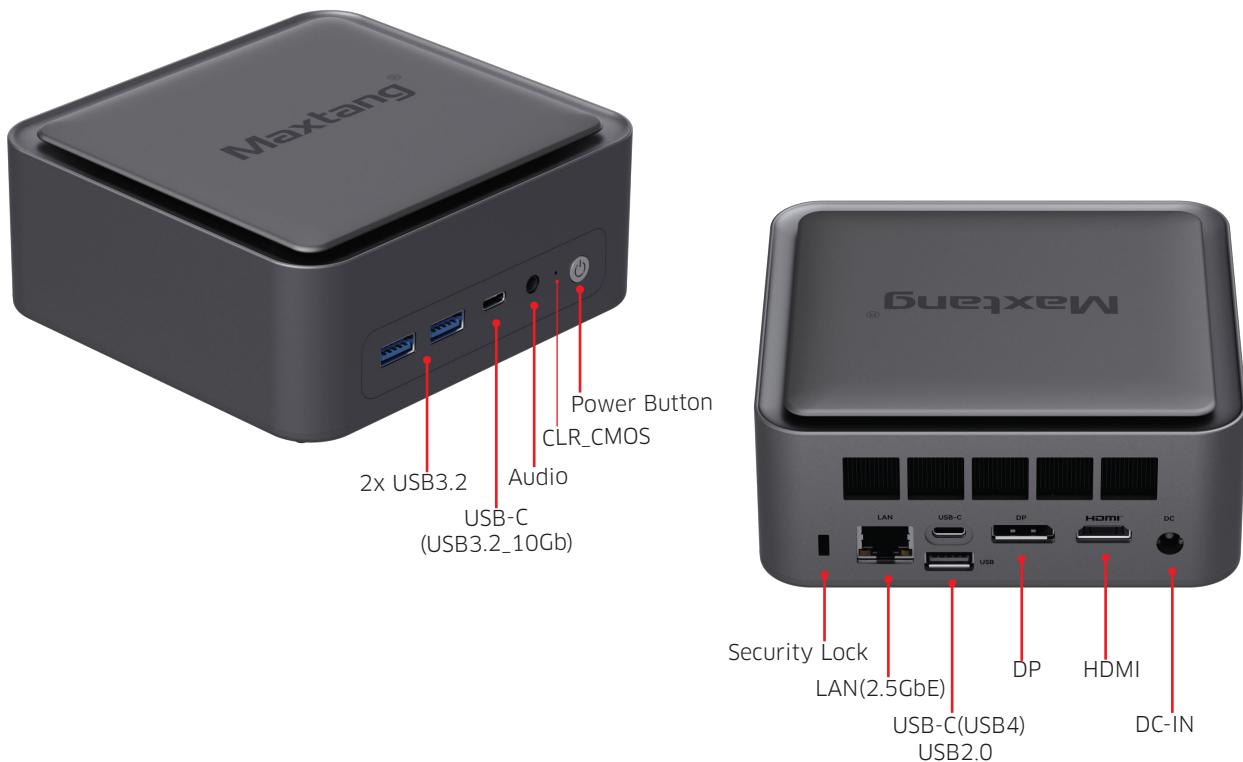

Technical Specifications

Processor	AMD Ryzen™	Ryzen™ 7 7735HS	Ryzen™ 7 7840HS	Ryzen™ 7 8845HS
	# of Cores/Threads	8C/16T	8C/16T	8C/16T
	Max. Boost Clock	4.75GHz	5.1GHz	5.1GHz
	Base Clock	3.2GHz	3.8GHz	3.8GHz
	L3 Cache	16MB	16MB	16MB
	AMD Radeon™ Graphics	680M	780M	780M
	AI Engine Capabilities	N/A	N/A	YES
Processors	AMD Ryzen™	Ryzen™ 5 6600H	Ryzen™ 9 6900HX	
	# of Cores/Threads	6C/12T	8C/16T	
	Max. Boost Clock	4.5GHz	4.9GHz	
	Base Clock	3.3GHz	3.3GHz	
	L3 Cache	16MB	16MB	
	AMD Radeon™ Graphics	660M	680M	
	AI Engine Capabilities	N/A	N/A	
	BIOS	AMI UEFI BIOS		
Memory	Type	Dual Channel SO-DIMM DDR5		
	Max. Capacity	64GB		
Display	GPU	AMD Radeon™ Graphics		
	Interface	1xDP1.4+1xHDMI2.0+1xUSB4		
Ethernet	Controller	Intel i226		
	Speed	10/100/1000/2500Mbps		
	Interface	1xRJ45		
Audio	Audio Codec	CONEXANT HD CX20632		
	Interface	1xCTIA 2in1 Audio Jack, supports Line-out+Mic-in		
Hardware		CPU temperature, System temperature, Onboard voltage, Watchdog		
Storage	M.2_M	2xM.2_2280 Slot for NVMe		
Expansion	M.2_E	1xM.2_2230 Slot for Wi-Fi and Bluetooth, Support PCIe&USB		
Other I/O	USB3.2	2xUSB3.2		
	USB2.0	1xUSB2.0		
	USB-C	2xUSB-C		
	TPM	Optional		
Dimension	Size	127 mm x 135 mm x 55mm (L x W x H)		
Power	Standard Port	19V/20V DC-in		
Temperature	Operating Temp.	0°C to 50°C		
	Storage Temp.	-20°C to 70°C		
Cooling		Active		
Operating System		Supports Windows 10/11 64bit, Linux 64bit		

Dimension

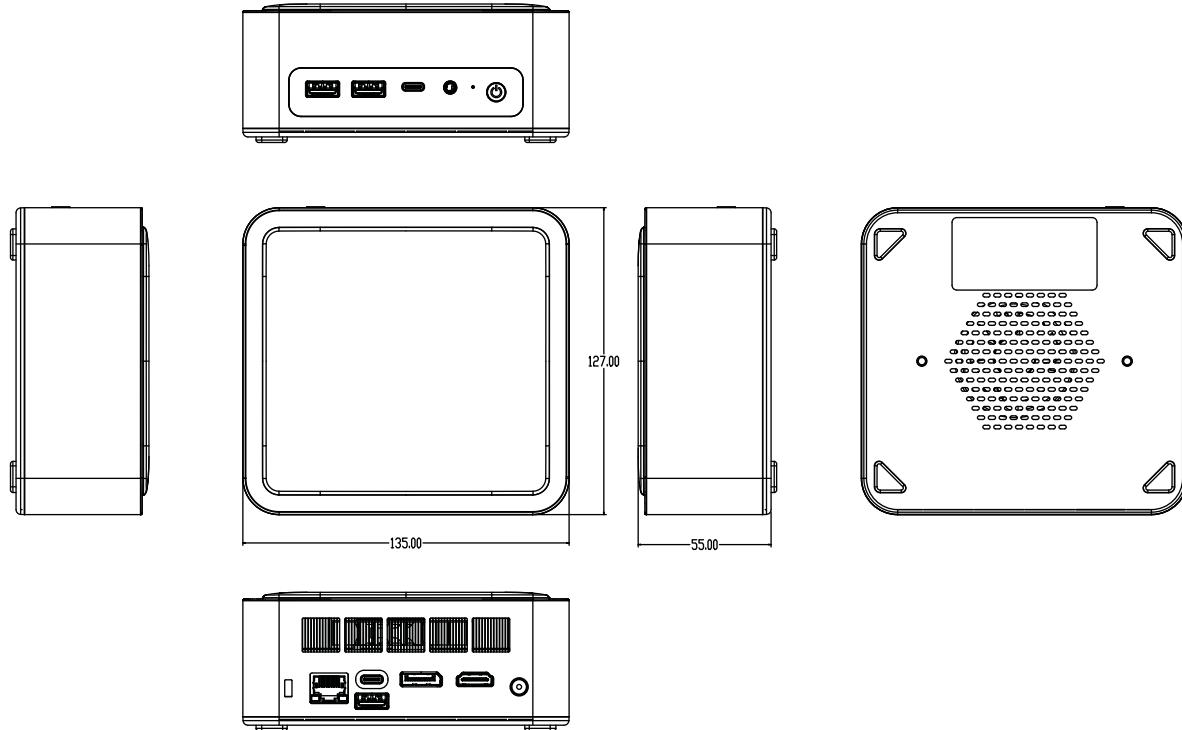

Color Options



Space Gray



Pearl White

Copyright © 2025 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High Definition Multimedia Interface, HDMI Trade Dress, and HDMI Logo's are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.