

NX6412-4L

Intel Elkhart Lake Processor based Ultra Compact Fanless Mini PC with 4LAN



Features

- CPU: Intel Elkhart Lake J6412 Processor
- Memory: Single Channel SO-DIMM DDR4 up to 32GB
- Display: Intel Integrated Graphics display via 2xHDMI2.0
- I/O Ports: 4xLAN, 2xUSB3.2, 2xUSB2.0, 1xCOM, SIM
- Ethernet: 10/100/1000/2500Mbps
- Storage: 1xM.2 Key B for SATA SSD/4G, 1xSATA
- Expansion: 1xM.2 Key E for WiFi and Bluetooth
- Power: 12V DC-in




Introduction

The Maxtang's NX6412-4L incorporated the Intel® Elkhart Lake processors, offering you greater computing power with cost advantages. Supports Single-channel SO-DIMM DDR4 up to 32GB, dual independent displays via 2xHDMI2.0. A rich i/o interface includes 4xLAN, 2xUSB3.2, 2xUSB2.0, 1xCOM, 1xSIM, and up to 2.5GbE for high speed communication. It provides an excellent customer experience and a long-lasting life expectancy for future development.

Based on small form factors, the compact design at 127mm x 127mm x 43.5mm makes it great for space-saving. The PC has 1xM.2 for storage, 2.5-inch SATA optional, built-in Wi-Fi and Bluetooth, SIM slot for expansion. Desktop ready for easy installation. It builds with advanced cooling construction with a compact, fanless design and overcomes noise challenges. Its comprehensive connectivity makes it suitable for various applications.



I/O Interfaces

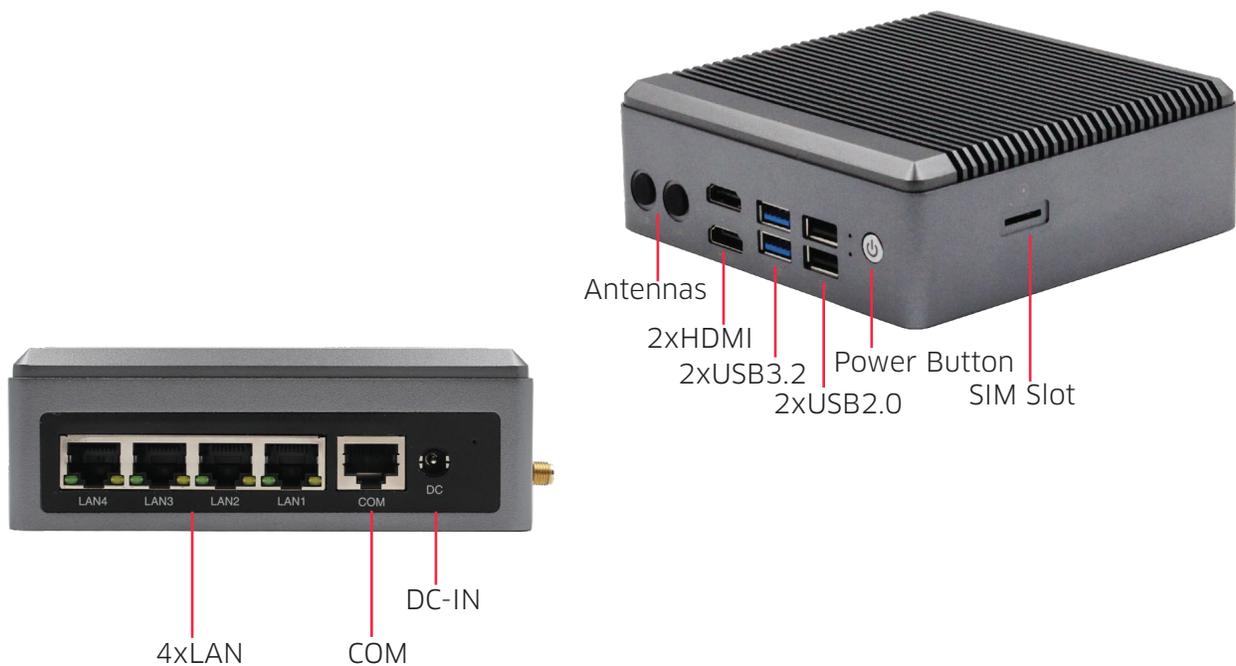


Technical Specifications

Processor	CPU	J6412
	Base Frequency	2.00GHz
	Burst Frequency	2.60GHz
	Cache	1.5MB L2
	TDP	10W
Memory	Type	Single Channel SO-DIMM DDR4
	Max. Capacity	32GB
Display	GPU	Intel® UHD Graphics for 10th Gen Intel® Processors
	Display via	2xHDMI2.0
Ethernet	Speed	10/100/1000/2500Mbps
	Controller	4x Intel i226
	Interface	4x RJ45
	Wake on LAN	Yes
Storage	M.2	1x M.2 Key B for 2242/2280 SSD (SATA ONLY) or 4G Module
	SATA	1x SATA interface for 2.5-inch HDD
Expansion	M.2	1x M.2 Key E for WiFi and Bluetooth
	SIM	1x SIM Slot
Other I/O	COM	1x RS232 RJ45 COM Console
	USB2.0	2xUSB2.0
	USB3.2	2xUSB3.2
Dimension	Size	127mm x 127mm x 43.5mm
Weight	N.W.	TBD
Power	Standard Port	12V DC-in
Temperature	Operating Temp.	- 20°C to 60°C
	Storage Temp.	- 40°C to 80°C
Cooling Method		Passive
Operating System		Windows 10/11 64bit, Linux 64bit

* All specifications and photos are subject to change without notice.

Dimension(mm)

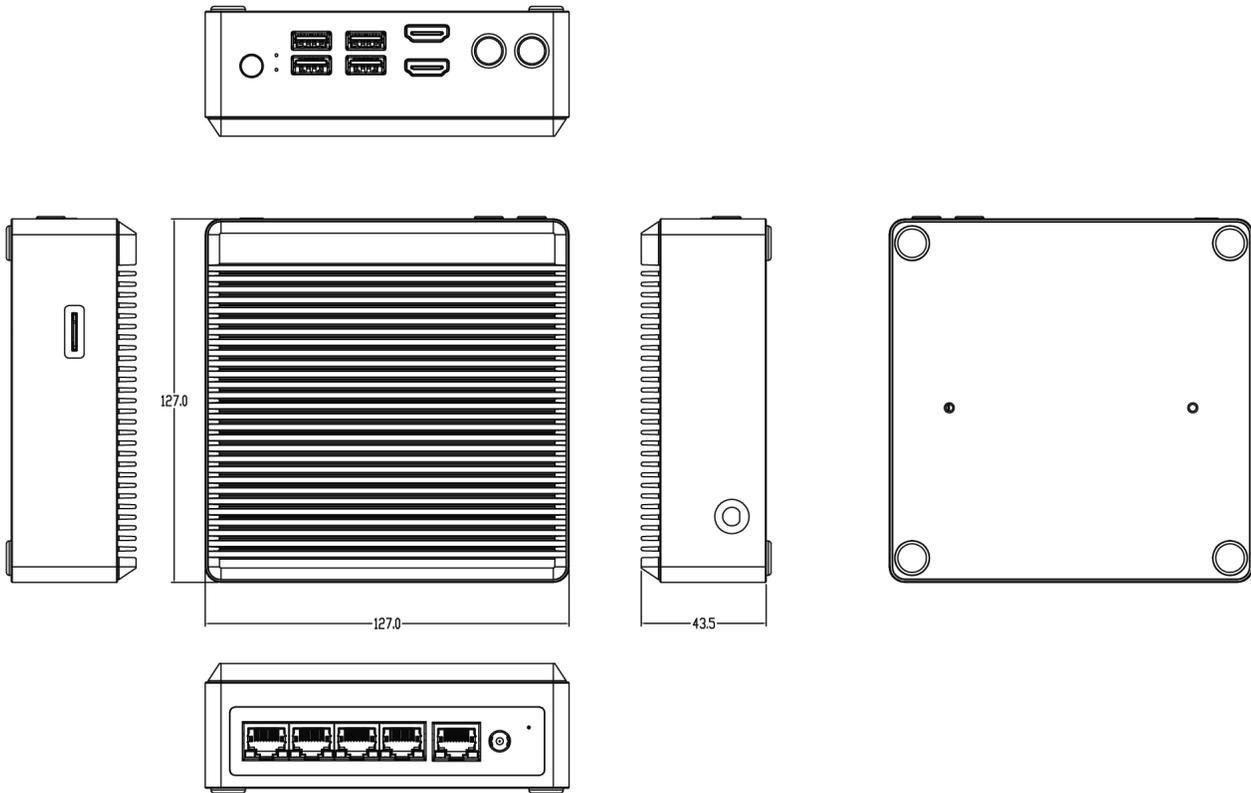

Copyright © 2022 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.