

SXC-ALN30

Intel® Alder Lake N Series CPU based Embedded Mini PC
supports multiple displays with 3 HDMI 2.0



Features

- CPU: Intel® Alder Lake N Processor
- Memory: Single Channel SO-DIMM DDR4 up to 16GB
- GPU: Integrated Intel® UHD Graphics, Max three display screens
- Ethernet: 10/100/1000Mbps
- Storage: M.2 Key_M Slot for SATA/NVMe SSD
M.2 Key_B Slot for SATA/NVMe SSD or 4G Module
- I/O Ports: 2xLAN, 2xCOM, 4xUSB3.2, 2xUSB2.0, 3xHDMI
- Expansion: M.2_E Slot for Wi-Fi(support PCIe&USB), Nano SIM
- Power: 12V/19V DC-IN(9-35V optional)
- Support HDMI Hot-Plug Lock, RTC/W



Introduction

The SXC-ALN30 is a high-performance, compact embedded mini PC designed to meet the demanding needs of industrial and commercial applications. Powered by Intel® Alder Lake N processors, it delivers robust processing capabilities, supporting up to 16GB DDR4 memory and integrated Intel® Graphics that drive up to three 4K displays via HDMI 2.0. Its versatile I/O options, including dual LAN, six USB ports, and two COM ports, make it ideal for applications like automation, digital signage, and IoT deployments.

Built for reliability, the SXC-ALN30 features a durable, fanless design that operates in extreme temperatures (-20°C to 60°C) and supports standard 12V/19V DC power inputs. With dual M.2 slots for SATA/NVMe SSDs and optional 4G connectivity, it offers scalable storage and connectivity options to meet diverse operational requirements. Compact yet powerful, the SXC-ALN30 is your go-to solution for modern industrial computing.





H/W Monitor



Watchdog



I/O Interfaces

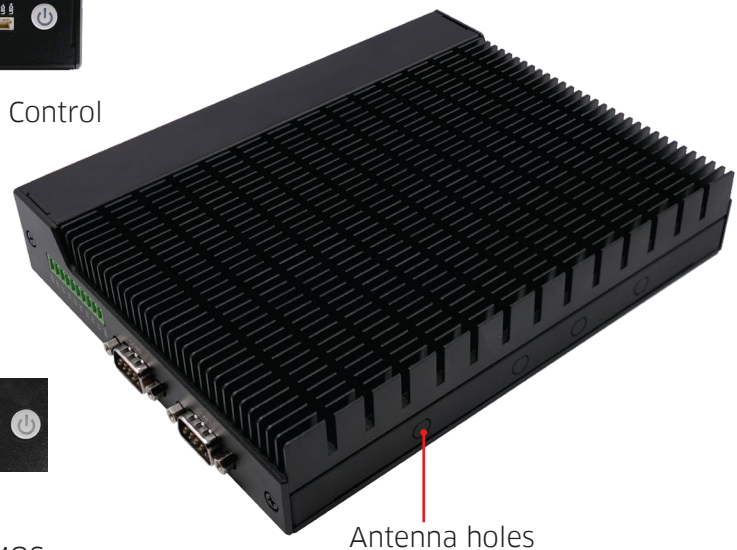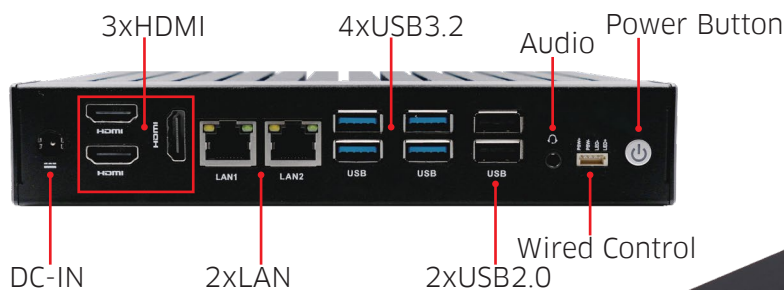


Technical Specifications

Processor	Intel® Processor	N97	Core i3-N305
	Total Cores/Threads	4C	8C/8T
	Max Turbo Frequency	3.60GHz	3.80GHz
	Intel® Smart Cache	6MB	6MB
	Processor Base Power	12W	15W
Memory	BIOS	AMI UEFI BIOS	
	Type	Single Channel SO-DIMM DDR4	
	Max. Capacity	16GB	
Display	Graphics	Integrated Intel® UHD Graphics depends on the CPU.	
	Interface	3x HDMI2.0	
	Max. Displays	Three Screens for Mutiple Displays	
Ethernet		HDMI Hot-Plug Lock	
	Max. Speed	10/100/1000 Mbps	
	Controller	RTL8111H	
	Interface	2x RJ45	
Audio	Wake on LAN	Yes	
	Audio Codec	Realtek ALC897 High Definition Audio Codec	
	Interface	1x CTIA 2 in 1 Audio Jack	
Storage	M.2_S	1x M.2 Key M for 2280 SATA/NVMe PCIe X1 SSD	
	M.2_SW5G	1x M.2 Key B for 2242/2280 SATA/NVMe PCIe X1 SSD or 3042 4G Module	
Expansion	M.2_E	1x M.2_2230 Slot for Wi-Fi, support PCIe and USB.	
	Nano SIM	1x Nano SIM	
Other I/O	COM	2x COM(RS232 by default, RS485 optional)	
	USB2.0	2	
	USB3.2	4	
	GPIO	8-bit	
	Wired Control	1	
Real Time Clock	TPM	Onboard, optional	
	RTC	Support RTC set up, independently for each day of the week.	
Dimension	Size	190mm x 150mm x 35mm	
Weight	N.W.	TBD	
Power	Standard Port	12V/19V DC-IN (9-35V optional).	
Temperature	Operating Temp.	- 20°C to 60°C	
	Storage Temp.	- 40°C to 80°C	
Cooling Method		Passive	
Operating System		Windows 10/11 64bit, Linux 64bit	

* All specifications and photos are subject to change without notice.

Dimension (in mm)

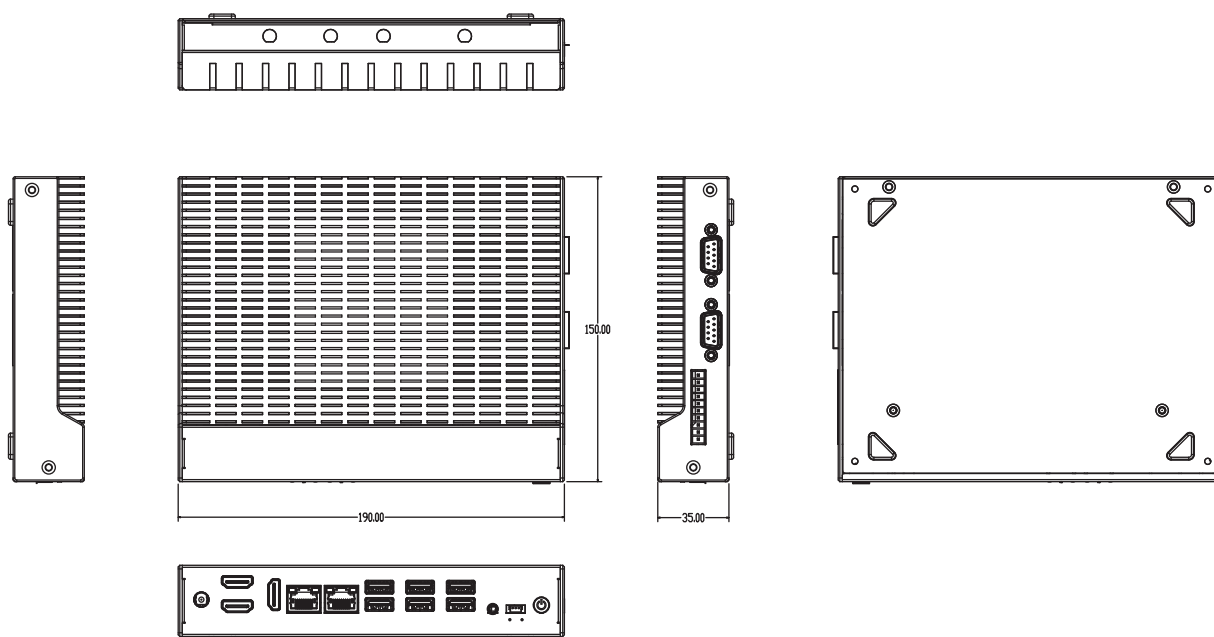

Copyright © 2025 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.