

IXH-KL35

Intel® Skylake/Kabylake-R based Embedded Industrial PC



Features

- CPU: Intel® Skylake/Kabylake-R Processor
- Memory: Dual Channel SO-DIMM DDR4 up to 32GB
- Display: Integrated Intel® Graphics display via HDMI+VGA
- Ethernet: 10/100/1000Mbps
- Storage: SATA3.0 FPC, mSATA
- Expansion: M.2 for WiFi, Nano SIM Slot
- Power: 9V-35V



Introduction

The Maxtang IXH-KL35 is a powerful yet energy-efficient embedded industrial computer, featuring Intel® Skylake/Kaby Lake-R processors. It supports up to 32GB of dual-channel DDR4 memory and provides UHD/HD Graphics with HDMI and VGA outputs for sharp, reliable visuals. Versatile storage options, including SATA FPC, mSATA, and 4G connectivity via a Nano SIM slot, make it adaptable for a wide range of industrial applications.

Designed for reliability in demanding environments, the IXH-KL35 offers dual Gigabit Ethernet, six COM ports, four USB 3.2 ports, four USB 2.0 ports, GPIO, and a wide 9V-35V DC input. Its durable construction and comprehensive I/O interface make it ideal for industrial automation and smart transportation. Combining robust performance with cost efficiency, the IXH-KL35 is a dependable choice for modern industrial needs.



H/W Monitor



Watchdog




GPIO



Brightness



I/O Interfaces

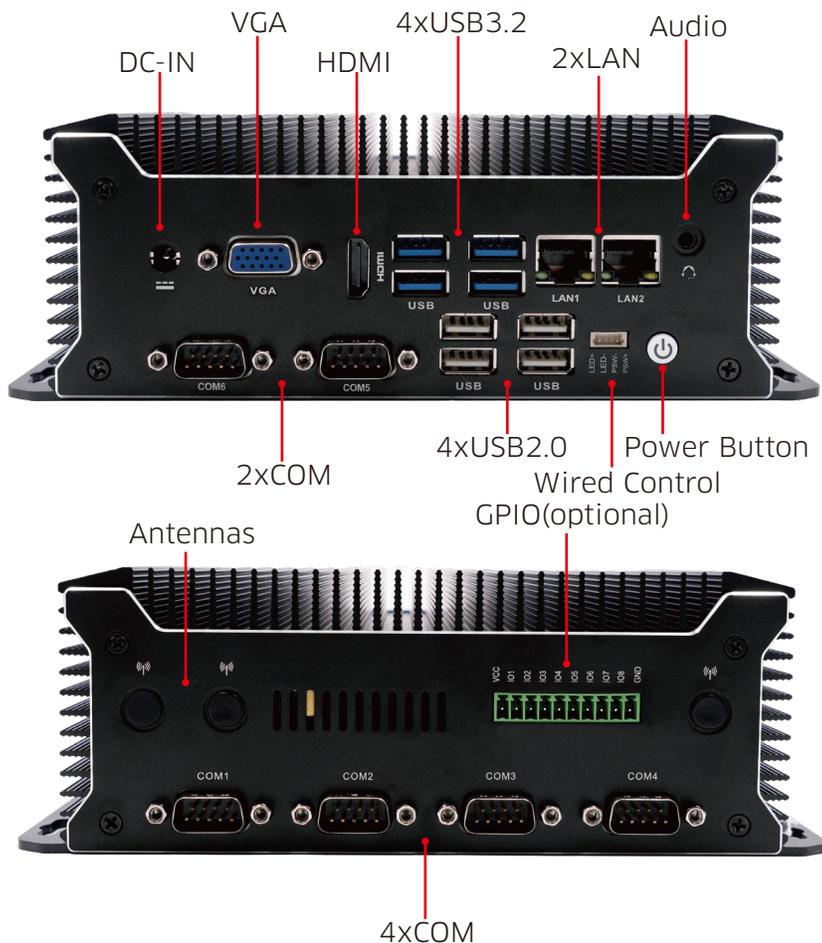


Technical Specifications

Processor	CPU	i5-8250U	i5-7200U	i5-6200U
	Cores/Threads	4C/8T	2C/4T	2C/4T
	Base Frequency	1.60GHz	2.50GHz	2.30GHz
	Max Turbo Frequency	3.40GHz	3.10GHz	2.80GHz
	Cache	6MB	3MB	3MB
	TDP	15W	15W	15W
	BIOS	AMI UEFI BIOS		
Memory	Type	SO-DIMM Dual Channel DDR4		
	Max. Capacity	32GB		
Display	GPU	Intel UHD/HD Graphics based on CPU		
	Display via	HDMI+VGA		
Ethernet	Speed	10/100/1000 Mbps		
	Controller	intel i210 + intel i219		
	Interface	2xRJ45		
Audio	Wake on LAN	Yes		
	Audio Codec	Realtek HD		
Hardware	Interface	1xCTIA, Line-out + Mic-in in one, supports power amplifier		
	Storage	CPU system temperature, on-board DC-in voltage, watchdog, auto power on		
Expansion	mSATA	1x mSATA for SSD or 4G Module		
	SATA3.0	1x SATA3.0 FPC Interface		
I/O Interface	M.2_E	1x M.2_E 2230 Slot for Wi-Fi		
	Nano SIM	1		
I/O Interface	LAN	2		
	COM	Default: 4*RS232+2*RS485(COM5, COM6)		
		Optional: 6*RS232		
	USB3.2	4		
	USB2.0	4		
	Audio	1xCTIA Audio Jack		
	GPIO	8-bit. Optional		
	Wired Control	1		
Dimension	Size	205 mm x 125mm x 70.5mm		
Power	Standard Port	9V-35V DC-IN		
	Peripheral Input	For Fan and SATA		
	LED Indicator	Power indicator		
Temperature	Operating Temp.	-20°C to 60°C		
	Storage Temp.	-40°C to 80°C		
Cooling		Passive		
Operating System		Win7 32bit/64bit, Win10/11 64bit, Linux 32/64bit		

*All specifications and photos are subject to change without notice.

Dimensions

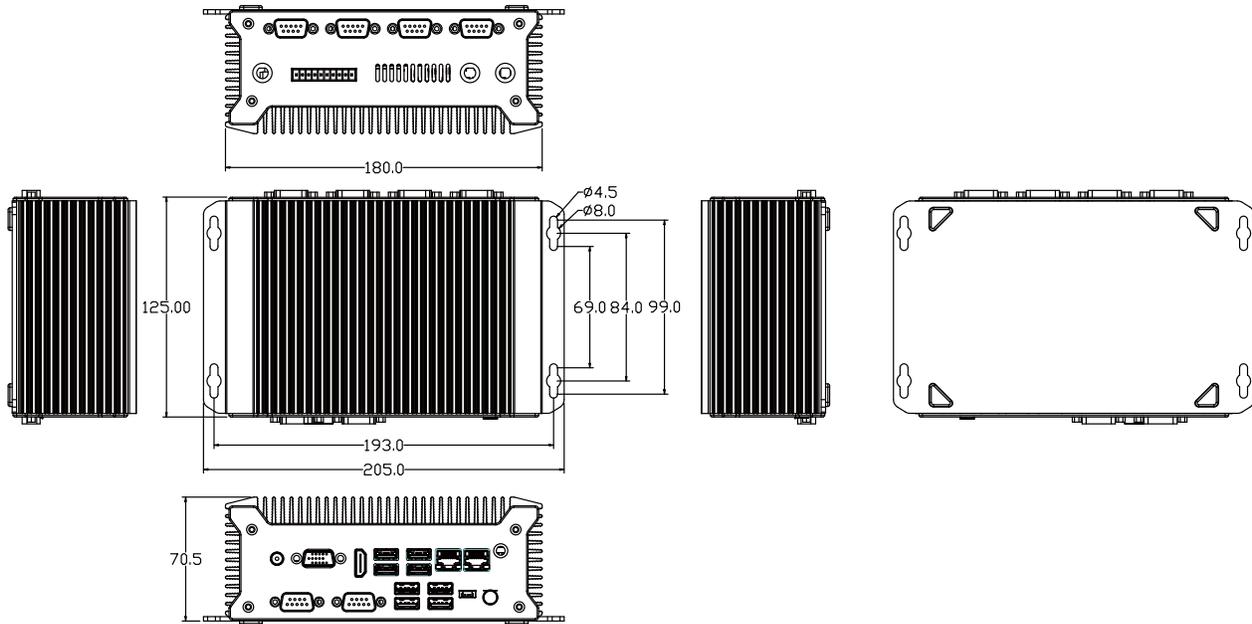

Copyright © 2025 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.