

IXH-AL35

Intel® Alder Lake/Raptor Lake U Series based Embedded Fanless Industrial PC



Features

- CPU: Intel® Alder Lake/Raptor Lake U Series Processor
- Memory: Dual Channel SO-DIMM DDR4 up to 64 GB
- Display: Intel® Integrated Graphics, display via 2xHDMI®
- Ethernet: 10/100/1000Mbps
- Storage: SATA, M.2_2242 for SATA/4G, M.2_2280 for NVMe
- Expansion: M.2 for Wi-Fi
- Power: 9V-35V (2-Pin DC-IN Phoenix Connector)




Introduction

The Maxtang IXH-AL35 is a compact, embedded industrial PC powered by the Intel® Alder Lake/Raptor Lake U series processor. It supports up to 64GB of dual-channel SO-DIMM DDR4 memory, providing enhanced performance and productivity. A rich I/O interface includes 2xHDMI®, 2xRJ45 gigabit network controllers, six serial ports (default 6*RS232+COM1-2 can be set as RS485/RS422 under BIOS settings), and eight USB ports that suit various applications' requirements.

The IXH-AL35 includes a comprehensive I/O interface for easy integration and a rugged design for harsh environments. It has a long-lasting life cycle based on its stability and reliability. It is made with an aluminum enclosure that contains a fanless structure intended to protect internal components from dust and debris in a harsh industrial environment.



I/O Interfaces

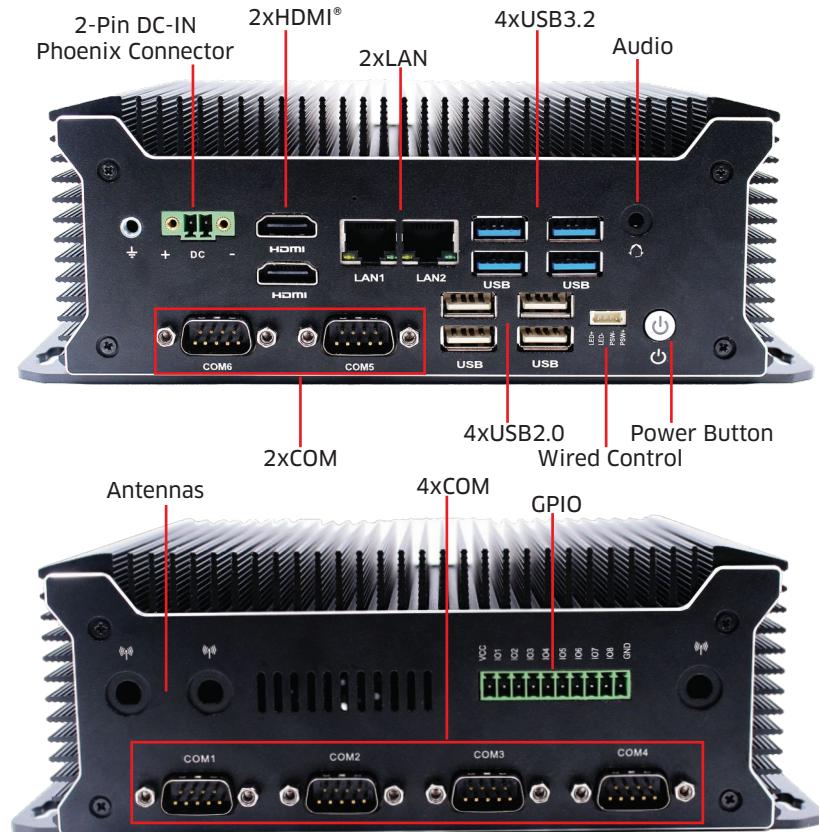


Technical Specifications

Processor	Intel® Core™ CPU	i7-1255U	i5-1235U	i3-1215U
	Total Cores/Threads	10C/12T	10C/12T	6C/8T
	P-core Max Turbo Frequency	4.70GHz	4.40GHz	4.40GHz
	E-core Max Turbo Frequency	3.50GHz	3.30GHz	3.30GHz
	Intel® Smart Cache	12MB	12MB	10MB
	BIOS	AMI UEFI BIOS		
Memory	Type	Dual Channel SO-DIMM DDR4		
	Max Capacity	64GB		
Display	GPU	Integrated Intel® UHD Graphics/Iris® Xe Graphics eligible		
	Display via	2xHDMI2.0		
Ethernet	Speed	10/100/1000Mbps		
	Controller	1x Intel® i210+1x Intel® i219		
	Interface	2x RJ45		
	Wake on LAN	Yes		
Audio	Audio Codec	Realtek HD		
	Interface	1xCTIA 2-in-1 Audio Jack		
Hardware		System temperature, Onboard voltage, Watchdog, Auto power on		
Storage	M.2	1x M.2_2242 for SATA SSD/4G Module		
	M.2	1x M.2_2280 for NVMe SSD		
	SATA	1x SATA3.0 FPC Interface		
Expansion	M.2	1x M.2 for Wi-Fi, support PCIE & Intel® Integrated Connectivity (CNVi)		
I/O Interface	COM	6xCOM: default 6*RS232. The COM1_2 can be set as RS485/RS422 in BIOS		
		The COM5, COM6 are 2-wire serial communication		
	USB2.0	4x USB2.0		
	USB3.0	4x USB3.2		
	GPIO	8-bit		
	Wired Control	1		
Dimension	Size	205mm x 125mm x 70.5mm		
Power	Standard Input	9V-35V. 2-Pin DC-IN Phoenix Connector		
	Peripheral Input	For Fan and SATA		
	LED Indicator	Power indicator		
Temperature	Operating Temp.	-20°C to 60°C		
	Storage Temp.	-40°C to 80°C		
Cooling		Passive		
Operating System		Win10/11 64bit, Linux 64 bit		

*All specifications and photos are subject to change without notice.

Dimensions

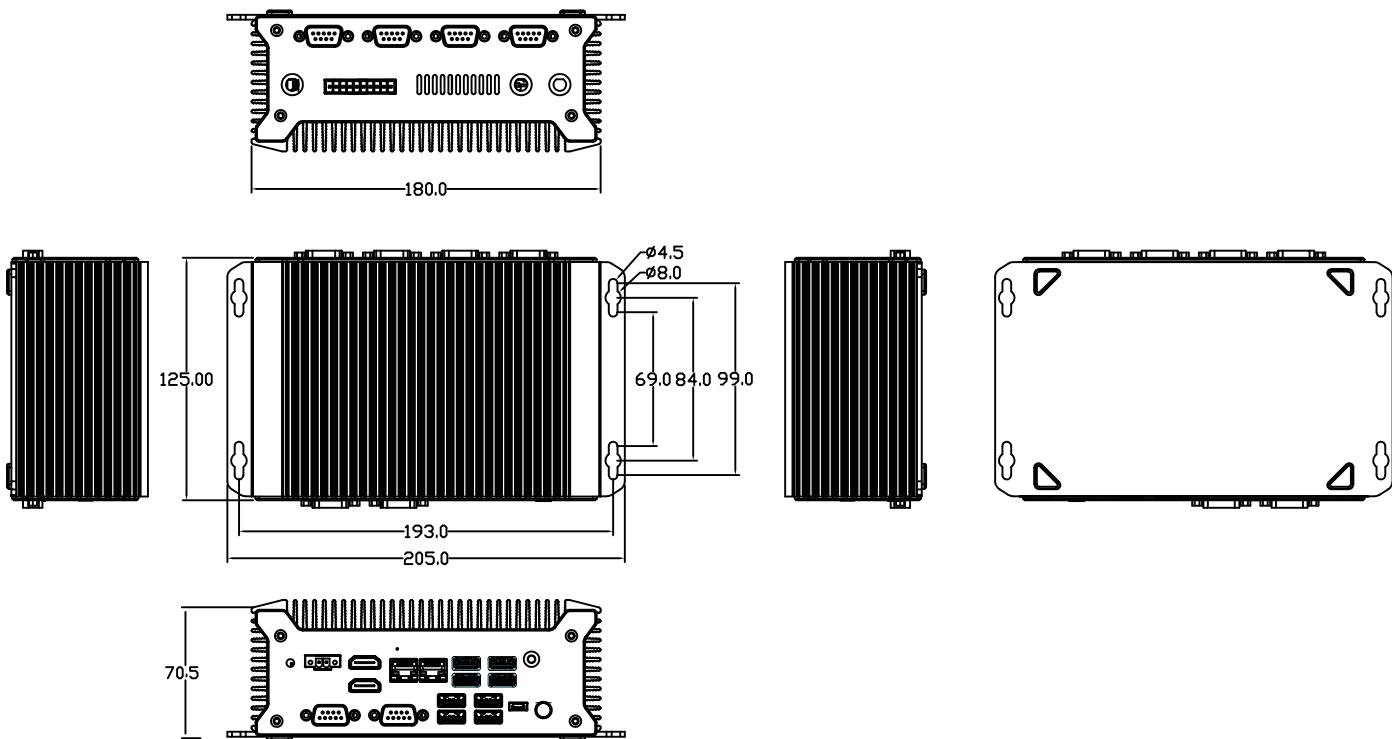

Copyright © 2022 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are registered. The terms HDMI, HDMI High-Definition Multimedia Interface, and HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.