


Applications

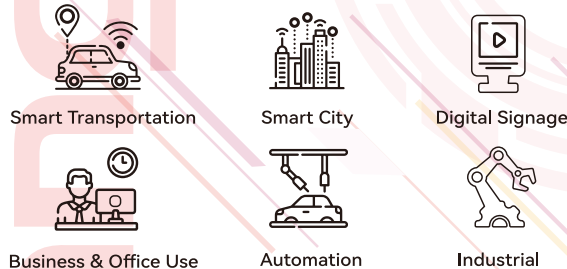

Contact

Europe
Beck Huang Sales Manager
 Beck@datangpc.com

Americas
Hilda Huang Sales Manager
 Hilda.huang@datangpc.com

Asia Pacific & Other Regions
Eady Lu Sales Manager
 Eady@datangpc.com

Sales Director
Alex Diao
 Alex@datangpc.com

For more information, please visit:

<https://www.maxtangpc.com> <https://store.maxtangpc.com>



Copyright©2024 Maxtang Technology Co., Ltd. Shenzhen Maxtang Computer Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.

*The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade address, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

© Copyright Maxtang® 2026

Maxtang®

MAXIMIZING YOUR COMPUTER PRODUCTIVITY

www.maxtangpc.com

Ultra-Compact Mini PC with 2HDMI

MUC-5095/ MUC-TL50



CPU Intel® Celeron® N5095/N5095A/N5105/6305
Intel® Core™ i3/i5/i7 1115G4/1135G7/11320H/
1165G7

Memory 2xSO-DIMM DDR4, Max. 32GB/64GB

Display Intel Iris Xe/UHD Graphics, Interface: 2xHDMI®

Storage Expansion M.2 for NVMe/SATA SSD, SATA3.0(Selected SKUs),M.2 for Wi-Fi

Other I/O 2xUSB3.2, 2xUSB2.0, 1xUSB-C, Audio

Power 12V/19V DC-IN, Active Cooling

Ethernet 1x Realtek RTL8111H, Interface:1xRJ45

Dimension 128.7mm x 128.7mm x41.5mm

Operating Temperature 0°C to 50°C

Operating System Windows 10/11, Linux 64 bit

Ultra-Compact Mini PC with HDMI+DP+USB4/TBT4

MTN-FP850/ MTN-MTL50



CPU AMD Ryzen™Y Ryzen AI FP8 Series H255/260/HX370
Intel® Core™Core™ Ultra 125H/155H/255H

Memory 2xSO-DIMM DDR5, Max 96GB

Display AMD Radeon™ Graphics/Intel® Arc™ Graphics/Intel® Arc™ 140T Graphics
Interface: HDMI, DP, USB4/TBT4

Storage Expansion 2x M.2 for NVMe SSD, M.2 for Wi-Fi

Other I/O 2xUSB3.2, USB2.0, 1xUSB-C, 1xUSB4/TBT4, Audio

Power 19V/20V DC-in, Active Cooling

Ethernet 2x Realtek RTL8125 Interface:2xRJ45

Dimension 127mm x 129mm x55mm

Operating Temperature 0°C to 50°C

Operating System Windows 10/11 64bit, Linux 64bit

Ultra Compact Mini PC with HDMI+DP+USB4/TBT4

T0-FP750/ T0-RL50



CPU AMD Ryzen™ 6900H/6845HS/7840HS/7735HS/
6600H/6600U
Intel® Core™ i5/i7 1240P/12450H/13620H

Memory 2xSO-DIMM DDR5,Max. 64GB or Onboard LPDDR5, 24GB/32GB

Display AMD Radeon™ Graphics
Intel Iris Xe/UHD Graphics
Interface: HDMI, DP, USB4/TBT4

Storage Expansion 2xM.2 for NVMe SSD or (M.2 for SATA/ NVMe SSD+M.2 for NVMe SSD)
M.2 for Wi-Fi

Other I/O 2xUSB3.2, 1xUSB2.0, 1xUSB-C, 1xUSB4/TBT4, Audio

Power 19V/20V DC-IN, Active Cooling

Ethernet 1x Intel i226 Interface:1xRJ45

Dimension 127mm x 135mm x 55mm

Operating Temperature 0°C to 50°C

Operating System Windows 10/11, Linux 64 bit

Ultra Compact Fanless Mini PC with 2HDMI+4LAN

NX6412-4L



CPU Intel® Celeron® Processor J6412

Memory 1xSO-DIMM DDR4, Max. 32GB

Display Intel® UHD graphics
Interface: 2xHDMI®

Storage Expansion M.2 for SATA SSD/4G, SATA3.0, M.2 for Wi-Fi, SIM Slot

Other I/O 1xCOM (Console), 2xUSB3.2, 2xUSB2.0

Power 12V DC-IN, Passive Cooling

Ethernet 4x Intel i226 Interface: 4xRJ45

Dimension 127mmx127mmx43.5mm

Operating Temperature -20°C to 60°C

Operating System Windows 10/11, Linux

SXRL-20 Mini PC with 4HDMI+1HDMI_IN

Support HDMI Hot-Plug Lock, RTC/W

CPU Intel® Core™ i3/i5/i7 Processor SKUs: 1215U/1235U/1255U/1315U/1355U	Other I/O COM(Console), 2xUSB3.2, USB2.0, USB-C, Wired Control, Audio	Power 19V DC-IN/Phoenix 2-PIN Optional, Passive Cooling	Temperature -20°C to 60°C
Memory 2x SO-DIMM DDR4, Max. 64GB	OS Windows 10/11 64bit, Linux 64bit	Dimensions 280mmx195mmx28mm	Ethernet Intel i219+Intel i226 Interface:2xRJ45
Display Intel® UHD/Iris® Xe Graphics Interface: 5xHDMI(4xDM,OUT by default, 1HDMI_IN OPTIONAL)			
Storage Expansion M.2 for NVMe/SATA SSD, M.2 for NVMe SSD/M.2 for Wi-Fi, M.2 for 4G/5G, SIM Slot			



SXC-ALN30 Mini PC with 3HDMI+2COM


Support HDMI Hot-Plug Lock, RTC/W

CPU Intel Alder Lake N N97/N305	Other I/O 2x COM, 4xUSB3.2, 2xUSB2.0, GPIO, Wired Control, Audio	Power 12V/19V DC-IN or 9V-35V Optional, Passive Cooling	Temperature -20°C to 60°C
Memory 1x SO-DIMM DDR4, Max. 16GB/32GB	OS Windows 10/11 64bit, Linux 64bit	Dimensions 190mmx150mmx35mm	Ethernet 2x Realtek RTL8111H Interface:2xRJ45
Display Intel UHD Graphics Interface:3xHDMI			
Storage Expansion M.2 for SATA/NVMe SSD, M.2 for SATA/NVMe SSD or 4G, M.2 for Wi-Fi, Nano SIM Slot			



SOM-MTL95 COM EXPRESS® MODULE


CPU Intel® Meteor Lake Core™ Ultra 1255U/1255H/155H/165H	Other I/O 2xCOM, 2xUSB4/TBT4, 4xUSB3.2, 8xUSB2.0, GPIO, LPC, Audio	Power ATX: Vin, VSB, AT; Vin	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR5, Max. 96GB	OS Windows 10/11 64bit, Linux 64bit	Dimensions 95mm x 95mm	Ethernet 1xIntel i226, Interface:1xRJ45
Display Integrated Intel Graphics, Interface: 30DDI, UDSxDP			
Storage Expansion 2xSATA3.0,PEG PCIe, 16 lanes/8lanes, bifurcate to 1x8, 2x4			



FP-710 Mini-ITX MOTHERBOARD


AMD RYZEN

CPU AMD® Ryzen Pro, Ryzen AI 8000 Series Processor 8845HS	Other I/O 6xCOM, 2xUSB3.2, 6xUSB2.0, GPIO, Audio	Power 19V/12V DC-IN	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR5, Max. 96GB	OS Windows 10/11, Linux 64bit	Dimensions 170mm x 170mm	Ethernet RTL8111H+RTL8125 Interface: 2xRJ45
Display AMD Radeon 780M Graphics, Interface: 4x DP			
Storage Expansion 2xM.2 for NVMe SSD, M.2 for WiFi PCIe X4			



SXA-6412 Mini PC with 3HDMI + COM+ PoE

CPU Intel® Celeron® Processor J6412	Other I/O COM, 4xUSB2.0, GPIO, I2C, Wired Control, Audio	Power PoE Input or 19V DC-IN, Passive Cooling	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR4, Max. 32GB	OS Windows 10/11, Linux	Dimensions 170mm x 150mm x 39.5mm	Ethernet 2x Realtek RTL8111H Interface:2xRJ45
Display Intel UHD Graphics Interface:3xHDMI			
Storage Expansion M.2 for SATA SSD, M.2 for SATA/NVMe SSD, M.2 for Wi-Fi			



VHEHL30 Mini PC with 3HDMI+2COM

CPU Intel® Celeron® Processor J6412	Other I/O 1xCOM/2xCOM, 2xUSB3.2, 4xUSB2.0, 1xType-C, Audio	Power 12V/19V DC-IN or 9V-35V, Passive Cooling	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR4, Max. 32GB	OS Windows 10/11, Linux 64 bit	Dimensions 191mmx151mmx34mm	Ethernet 2xRTL8111H Interface: 2 xRJ45
Display Intel® UHD Graphics Interface:3xHDMI/2COM			
Storage Expansion M.2 for NVMe SSD, M.2 for SATA SSD/4G, M.2 for Wi-Fi/SIM Slot			




AL-35 3.5" SINGLE BOARD COMPUTER

CPU Intel® Alder Lake-U/Raptor Lake U 1215U/1235U/1255U	Other I/O 6xCOM, 4xUSB3.2, 4xUSB2.0, GPIO, Audio	Power 12V-35V, 2-Pin DC-IN Phoenix Connector	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR4, Max. 64GB	OS Windows 10/11, Linux 64 bit	Dimensions 146mm x 102mm	Ethernet Intel i219+Intel i210 Interface:2xRJ45
Display Intel® Iris® Xe/UHD Graphics, Interface:2xHDMI/2+ eDP/DPs			
Storage Expansion M.2 for SATA SSD/4G, M.2 for NVMe SSD, SATA3.0/FP, M.2 for Wi-Fi, SIM Slot			



ALD-70 Mini-ITX MOTHERBOARD

CPU 12th/13th/14th Gen Intel® Desktop Series, LGA1700 Socket65W	Other I/O 6xCOM, 4xUSB3.2, 5xUSB2.0, GPIO, PS2, Audio	Power 24-PIN ATX+12V Auxiliary ATX Supply(2x4)	Temperature -20°C to 60°C
Memory 2x SO-DIMM DDR4, Max. 64GB	OS Windows 10/11, Linux 64 bit	Dimensions 170mm x 170mm	Ethernet 1x Intel i219 + 2x Intel i226 Interface: 3xRJ45
Display Intel® Integrated Graphics, Interface: DP/HDMI, eDP			
Storage Expansion M.2 for NVMe/SATA SSD, 2xSATA3.0 M.2 for Wi-Fi, PCIe X16			



SXC-FP530/SXC-RL30 Mini PC with 4HDMI+2COM


Support HDMI Hot-Plug Lock, RTC/W

CPU AMD Ryzen™ Embedded R2314 / R2514, 12th/13th Gen Intel® Core™ i3/i5/i7	Other I/O 2x COM, 4xUSB3.2, 4xUSB2.0, USB-C, Wired Control, Audio	Power 12V/19V DC-IN or 9V-35V Phoenix optional/Passive/Active Cooling	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR4/DDR5, Max. 64GB	OS Windows 10/11 64bit, Linux 64bit	Dimensions 190mmx150mmx 35mm	Ethernet 2x Realtek RTL8111H or 2x Intel i226 Interface:4xHDMI
Display AMD Radeon™ Graphics Intel® UHD/Iris® Xe Graphics Interface: 4xHDMI			
Storage Expansion M.2 for NVMe/SATA SSD, M.2 for SATA SSD/4G, M.2 for Wi-Fi, Nano SIM Slot			



BXAL-10/BXTL-10 Embedded PC with 4HDMI


CPU Intel® Core™ i3/i5/i7/Celeron® Processor SKUs:1360P/1255U/1235U/1215U/1115G/1135G/1145G/1305	Other I/O 4xUSB3.2+2xUSB2.0 or (2xUSB3.2+4xUSB2.0), Audio	Power 12V/19V DC-IN, Passive Cooling	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR4, Max. 64GB	OS Windows 10/11 64bit, Linux 64bit	Dimensions 299mmx200mmx52.2mm	Ethernet Intel i226+Intel i219 or 2xIntel i210 Interface: 2 xRJ45
Display Intel Iris Xe/UHD Graphics Interface: 4 xHDMI/2.0			
Storage Expansion M.2 for NVMe SSD, SATA3.0, M.2 for Wi-Fi, 1*PCIe X4 Slot, M.2 for 4G/5G			



FP-535 3.5" SINGLE BOARD COMPUTER


AMD RYZEN

CPU AMD Ryzen FP5 R2000 Series R2312/R2314/R2514	Other I/O 6xCOM, 2xUSB3.2, 5xUSB2.0, GPIO, Audio	Power 9V-35V DC-IN	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR4, Max. 64GB	OS Windows 10/11, Linux 64bit	Dimensions 146mm x 102mm	Ethernet 2xRTL8111H, Interface:2xRJ45
Display AMD Radeon™ Graphics, Interface: 2xHDMI/2.0+1x eDP/LVDS			
Storage Expansion mSATA, M.2 Key B for SATA/SSD/4G/5G, SATA3.0 FP, M.2 for Wi-Fi, SIM Slot			



ALD-76 mATX MOTHERBOARD


CPU 12th/13th/14th Intel® Desktop Series CPU(LGA1700 Socket)	Other I/O 5xCOM, 8xUSB3.2, 4xUSB2.0, Audio	Power ATX_24PIN + 2*8PIN	Temperature -20°C to 60°C
Memory 4xUDIMM DDR5, Max. 128GB	OS Windows 10/11, Linux 64bit	Dimensions 243.84mm x 243.84mm	Ethernet 3x Intel i210 + 1x Intel i219 Interface: 4xRJ45
Display Integrated Intel® Graphics, Interface: 4xHDMI+1xVGA(Pin)			
Storage Expansion M.2 for NVMe SSD, 8xSATA, 2*PCIe X8 or 1*PCIe X16, 2*PCIe X4			



SXC-ARL30 Mini PC with 4HDMI+2COM+USB-C

Support NPV, HDMI Hot-Plug Lock, RTC/W

CPU Intel® Core™ Ultra 5/7 SKUs:1215U/1235U/1255U/1220P/1240P/1260P	Other I/O 2x COM, 4xUSB3.2, 2xUSB2.0, USB-C, Wired Control, Audio	Power 19V DC-IN/9V-36V Phoenix 2-PIN, Passive/Active Cooling	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR5, Max. 96GB	OS Windows 11 64bit, Linux 64bit	Dimensions 190mmx150mmx 35mm	Ethernet Intel i219+Intel i226 Interface:2xRJ45
Display Intel Graphics/Intel® Arc™ graphics Interface: 4xHDMI+USB-C			
Storage Expansion M.2 for NVMe SSD, M.2 for SATA SSD or 4G, M.2 for Wi-Fi, Nano SIM Slot			




IXH-ALN35 Fanless Embedded Industrial PC with 6COM

CPU Intel® Alder Lake N Series Processor i3-N305/N97	Other I/O 6xCOM, 4xUSB3.2, 4xUSB2.0, GPIO, Wired Control, Audio	Power 9V-35V DC-IN/Phoenix 3-Pin optional, Passive Cooling	Temperature -20°C to 60°C
Memory 1xSO-DIMM DDR4, Max. 16GB/32GB	OS Windows 10/11 64bit, Linux 64bit	Dimensions 205mmx125mmx70.5mm	Ethernet 2xIntel i210 Interface: 2xRJ45
Display Intel® UHD Graphics Interface: HDMI, DP			
Storage Expansion mSATA for SSD/4G, SATA3.0, M.2 for Wi-Fi			



AL-10 Mini ITX MOTHERBOARD

CPU Intel® Core™ i3/i5/i7 SKUs:1215U/1235U/1255U/1220P/1240P/1260P	Other I/O 6xCOM, 4xUSB3.2, 4xUSB2.0, GPIO, Audio	Power 12V/19V DC-IN	Temperature -20°C to 60°C
Memory 2xSO-DIMM DDR4, Max. 64GB	OS Windows 10/11, Linux 64bit	Dimensions 170mm x 170mm	Ethernet Intel i219+Intel i226 Interface:2xRJ45
Display Integrated Intel® Iris® Xe/UHD Graphics, Interface: 4xHDMI/2.0, UDSxDP			
Storage Expansion M.2 for NVMe SSD, M.2 for SATA SSD/4G, SATA3.0, M.2 for Wi-Fi, Nano SIM Slot, PCIe X4			



ARD-75 ATX MOTHERBOARD

CPU Intel® Core™ Ultra Processor (LGA1851) + Z890 Chipset	Other I/O 6xCOM, 6xUSB3.2, 7xUSB2.0, PS/2, GPIO, LPT, Audio	Power ATX24pin+2*8pin	Temperature 0°C to 60°C
Memory 4xUDIMM DDR5, Max.192GB	OS Windows 10/11, Linux 64bit	Dimensions 304.8mmx218.44mm	Ethernet Intel i219+Intel i210, Interface: 2xRJ45
Display Integrated Intel Graphics, Interface: HDMI, DVI-I(VGA)			
Storage Expansion M.2 for NVMe/SATA SSD, 4xSATA M.2 for Wi-Fi, PCIe X1, 4*PCIe X4, 2*PCIe X8			

